# Exhibit K

### Case 2:23-cv-00379-JRG-RSP Document 76-11 Filed 08/21/24 Page 2 of 95 PageID #: 4227


#### Exhibit K - U.S. Patent No. 9,215,613 ("'613 Patent")

Accused Instrumentalities: smartphones, basic phones, tablets, laptops, and hotspot devices sold (including those sold in bundles with data plans) or used by T-Mobile and all versions and variations thereof ("Accused Instrumentalities") since the issuance of U.S. Pat. No. 9,215,613 (the "Asserted Patent").

#### Claim 1

Claim	Public Documentation
[1pre] A wireless end-user device, comprising:	The Accused Instrumentalities include "A wireless end-user device, comprising."  For example, T-Mobile sells and uses devices described by T-Mobile's website below (e.g., devices made by Samsung, Apple, Motorola, Google, and Kyocera). These devices constitute a wireless end-user device as described in claim 1. <i>See, e.g.</i> https://www.t-mobile.com/cell-phones

### Case 2:23-cv-00379-JRG-RSP Document 76-11 Filed 08/21/24 Page 3 of 95 PageID #: 4228

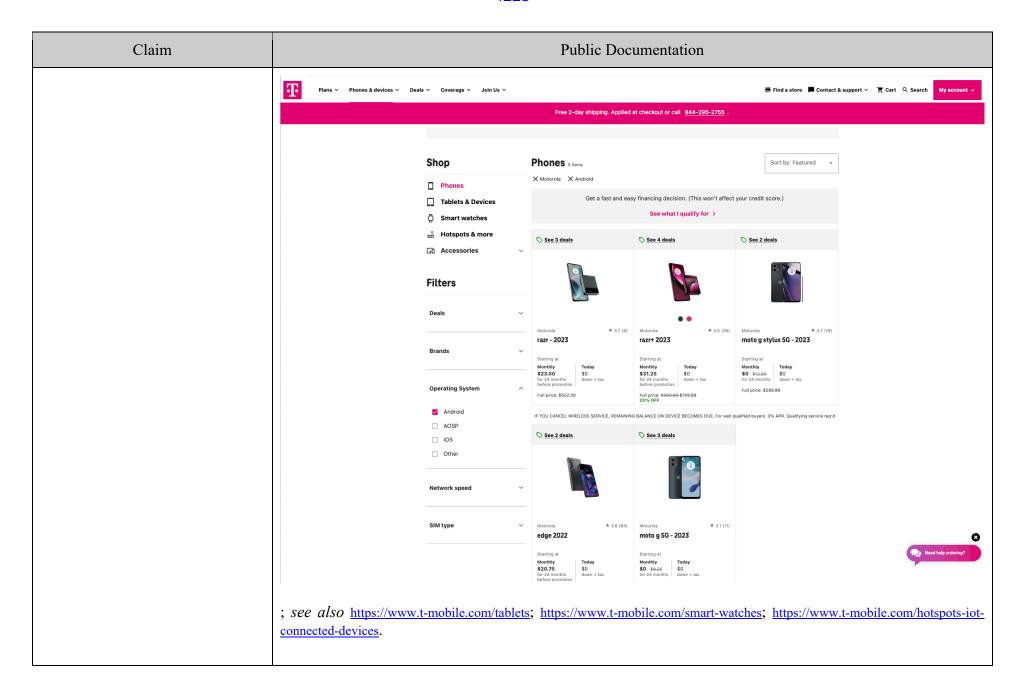

Claim	Public Documentation		
	As a specific example, Motorola's devices, including the Motorola which run the Android Operating System, and include a proceed phone/motorola-razr-plus-2023:		
	Additio	nal spec details	What's in the box
	Battery Description	3800 mAh	Motorola razr+ 2023
	Ports	USB Type-C	<ul><li>USB Type-C Cable</li><li>Guides</li></ul>
	Connectivity	Wi-Fi 802.11 a/b/g/n/ac/k/v/r/ax/Wi-Fi 6e, Bluetooth® 5.3, NFC	SIM Tool
	Processor	Qualcomm of Snapdragon 8+ Gen 1 Mobile Platform	
	Operating System	Android	For WEA capability, see <u>T-Mobile WEA</u> California residents: see the California Proposition 65 WARNING
	Ram	8 GB	
	Maximum Expandable Memory	0 GB	
	Wireless Network Technology Generations	4G LTE, 5G	
	Supported Email Platform	ns Apple Mail, POP3, IMAP4, SMTP, Microsoft® Exchange, AOL, AIM, Yahoo!® Mail, GMail	
	Hearing Aid Compatibility	и мз, тз	
	WEA Capable	true	
	Mobile Hotspot Capable	true	
	Frequency	GSM: 850 MHz, 900 MHz, 1800 MHz, 1900 MHz; UMTS: Band I (2100), Band II (1900), Band IV (1700/2100), Band VIII (900); 5G: n2, n5, n7, n12, n13, n14, n25, n26, n29, n30, n38, n41, n48, n66, n70, n71, n77, n78; LTE: 2, 3, 4, 5, 7, 8, 12, 13, 14, 17, 18, 19, 20, 25, 26, 28, 29, 30, 38, 39, 40, 41, 46, 48, 66, 71	
	Weight	6.56 Ounces	
	Length	0.28	
	Height	6.73	
	Width	2.91	

Claim	Public Documentation
[1a] a wireless wide area network (WWAN) modem to communicate data for Internet service activities between the device and at least one WWAN, when configured for and connected to the WWAN;	for Internet service activities between the device and at least one WWAN, when configured for and connected to the WWAN." This WWAN modem in the Accused Instrumentalities provides a connection to a T-Mobile's wireless network.  For example, Motorola's devices, including the Motorola razr+ 2023, comprise a wireless modem for com-
	municating with mobile service base stations, such as a 4G LTE or 5G modem. See, e.g., <a href="https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023">https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023</a> :

Claim	Public Documentation		
	Addition	al spec details	What's in the box
	Battery Description	3800 mAh	<ul><li>Motorola razr+ 2023</li><li>USB Type-C Cable</li></ul>
	Ports	USB Type-C	• Guides
	Connectivity	Wi-Fi 802.11 a/b/g/n/ac/k/v/r/ax/Wi-Fi 6e, Bluetooth® 5.3, NFC	SIM Tool
	Processor	Qualcomm of Snapdragon 8+ Gen 1 Mobile Platform	For WEA capability, see T-Mobile WEA
	Operating System	Android	California residents: see the California Proposition 65 WARNING
	Ram	8 GB	
	Maximum Expandable Memory	0 GB	
	Wireless Network Technology Generations	4G LTE, 5G	
	Supported Email Platforms	s Apple Mail, POP3, IMAP4, SMTP, Microsoft® Exchange, AOL, AIM, Yahoo!® Mail, GMail	
	Hearing Aid Compatibility	M3, T3	
	WEA Capable	true	
	Mobile Hotspot Capable	true	
	Frequency	GSM: 850 MHz, 900 MHz, 1800 MHz, 1900 MHz; UMTS: Band I (2100), Band II (1900), Band IV (1700/2100), Band VIII (900); 5G: n2, n5, n7, n12, n13, n14, n25, n26, n29, n30, n38, n41, n48, n66, n70, n71, n77, n78; LTE: 2, 3, 4, 5, 7, 8, 12, 13, 14, 17, 18, 19, 20, 25, 26, 28, 29, 30, 38, 39, 40, 41, 46, 48, 66, 71	
	Weight	6.56 Ounces	
	Length	0.28	
	Height	6.73	
	Width	2.91	

Claim	Public Documentation
(WLAN) modem to communicate data for Internet service activities between the device and at least one	The Accused Instrumentalities include "a wireless local area network (WLAN) modem to communicate data for Internet service activities between the device and at least one WLAN, when configured for and connected to the WLAN."  For example, Motorola's devices, including the Motorola razr+ 2023, comprise a wi-fi modem for communicating over a wi-fi networks. <i>See</i> , <i>e.g.</i> , <a href="https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023">https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023</a> :

Claim	Public Documentation		
	Addition  Battery Description	nal spec details	What's in the box  Motorola razr+ 2023
	Ports  Connectivity	USB Type-C Wi-Fi 802.11 a/b/g/n/ac/k/v/r/ax/Wi-Fi 6e, Bluetooth® 5.3, NFC	<ul> <li>USB Type-C Cable</li> <li>Guides</li> <li>SIM Tool</li> </ul>
	Processor Operating System	Qualcomm of Snapdragon 8+ Gen 1 Mobile Platform  Android	For WEA capability, see <u>T-Mobile WEA</u>
	Ram  Maximum Expandable  Memory	8 GB 0 GB	California residents: see the California Proposition 65 WARNING
	Wireless Network Technology Generations	4G LTE, 5G	
		s Apple Mail, POP3, IMAP4, SMTP, Microsoft® Exchange, AOL, AIM, Yahoo!® Mail, GMail	
	Hearing Aid Compatibility WEA Capable	M3, 13 true	
	Mobile Hotspot Capable	true	
	Frequency	GSM: 850 MHz, 900 MHz, 1800 MHz, 1900 MHz; UMTS: Band I (2100), Band II (1900), Band IV (1700/2100), Band VIII (900); 5G: n2, n5, n7, n12, n13, n14, n25, n26, n29, n30, n38, n41, n48, n66, n70, n71, n77, n78; LTE: 2, 3, 4, 5, 7, 8, 12, 13, 14, 17, 18, 19, 20, 25, 26, 28, 29, 30, 38, 39, 40, 41, 46, 48, 66, 71	
	Weight	6.56 Ounces	
	Length	0.28	
	Height	6.73	
	Width	2.91	

Claim	Public Documentation
[1c] a non-transient memory to store	The Accused Instrumentalities include "a non-transient memory to store."  For further example, Motorola's devices, including the razr+ 2023, are sold with memory. As a specific example, razr+ 2023 is sold or used by T-Mobile and includes 256 GB of storage and 8GB RAM of memory, in which control policies for applications are stored. <i>See, e.g.</i> , <a href="https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023">https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023</a> :

Claim	Public Documentation		
	Additio	nal spec details	What's in the box
	Battery Description Ports Connectivity	3800 mAh  USB Type-C  Wi-Fi 802.11 a/b/g/n/ac/k/v/r/ax/Wi-Fi 6e, Bluetooth® 5.3, NFC	<ul> <li>Motorola razr+ 2023</li> <li>USB Type-C Cable</li> <li>Guides</li> <li>SIM Tool</li> </ul>
	Processor Operating System Ram	Qualcomm of Snapdragon 8+ Gen 1 Mobile Platform  Android  8 GB	For WEA capability, see <u>T-Mobile WEA</u> California residents: see the California Proposition 65 WARNING
	Maximum Expandable Memory Wireless Network Technology Generations	0 GB 4G LTE, 5G	
		ns Apple Mail, POP3, IMAP4, SMTP, Microsoft® Exchange, AOL, AIM, Yahoo!® Mail, GMail	
	Hearing Aid Compatibility WEA Capable Mobile Hotspot Capable	true	
	Frequency	GSM: 850 MHz, 900 MHz, 1800 MHz, 1900 MHz; UMTS: Band I (2100), Band II (1900), Band IV (1700/2100), Band VIII (900); 5G: n2, n5, n7, n12, n13, n14, n25, n26, n29, n30, n38, n41, n48, n66, n70, n71, n77, n78; LTE: 2, 3, 4, 5, 7, 8, 12, 13, 14, 17, 18, 19, 20, 25, 26, 28, 29, 30, 38, 39, 40, 41, 46, 48, 66, 71	
	Weight	6.56 Ounces	
	Length	0.28	
	Height	6.73	
	Width	2.91	

Claim	Public Documentation
[1d] a differential traffic control policy list distinguishing between a first one or more applications resident on the device and a second one or more applications and/or services resident on the device, and	one or more applications resident on the device and a second one or more applications and/or services resident on the device."


Claim	Public Documentation		
	Addition	al spec details	What's in the box
	Battery Description  Ports  Connectivity  Processor	3800 mAh  USB Type-C  Wi-Fi 802.11 a/b/g/n/ac/k/v/r/ax/Wi-Fi 6e, Bluetooth® 5.3, NFC  Qualcomm of Snapdragon 8+ Gen 1 Mobile Platform	<ul> <li>Motorola razr+ 2023</li> <li>USB Type-C Cable</li> <li>Guides</li> <li>SIM Tool</li> </ul>
	Operating System Ram Maximum Expandable	Android  8 GB  0 GB	For WEA capability, see <u>T-Mobile WEA</u> California residents: see the California Proposition 65 <b>WARNING</b>
	Memory Wireless Network Technology Generations Supported Email Platforms	4G LTE, 5G Apple Mail, POP3, IMAP4, SMTP, Microsoft® Exchange, AOL, AIM,	
	Hearing Aid Compatibility WEA Capable	Yahoo!® Mail, GMail M3, T3 true	
	Mobile Hotspot Capable Frequency	true  GSM: 850 MHz, 900 MHz, 1800 MHz, 1900 MHz; UMTS: Band I (2100), Band II (1900), Band IV (1700/2100), Band VIII (900); 5G: n2, n5, n7, n12, n13, n14, n25, n26, n29, n30, n38, n41, n48, n66, n70, n71, n77, n78; LTE: 2, 3, 4, 5, 7, 8, 12, 13, 14, 17, 18, 19, 20, 25, 26, 28, 29, 30, 38, 39, 40, 41, 46, 48, 66, 71	
	Weight	6.56 Ounces	
	Length	0.28 6.73	
	Width	2.91	
		<u>8xNzEwNzI3MjU3L2dlbi8xNzEwNzI3MjU3L3NpZ</u>	com/ci/fattach/get/81413275/1686837226/redirect/1/ses- C9mVWc0dzJqVlJvVU92V2lZJTdFNGNwU3JySkJ F1Wng4OUpNTEFsWU50WHF1aEw0YWFSOTc2M3

Claim	Public Documentation
	NWUGRBeEdPRXVyc1A1UGJQVHZmYXhiWEw2dzg2UHdnJTIxJTIx/filename/motorola+razr%2B+- +2023.NA+Retail.UG.en-US.SSC8D89424-B.pdf:

#### Data usage

You can track the amount of data your phone uploads and downloads.

Find it: Swipe up from the home screen and tap Settings > Network & internet > Mobile network > choose a SIM card

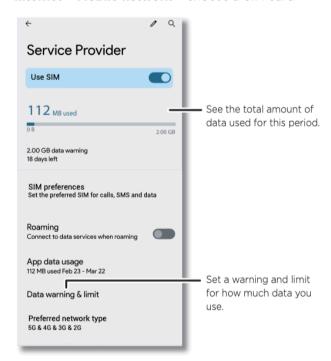

To see a breakdown of which apps are using data, swipe up from the home screen and tap Settings > Network & internet > Mobile network > App data usage. Some apps transfer data in the background when you're not viewing them—to help reduce this type of data usage, swipe up from the home screen and tap Settings > Network & internet > Data Saver, then tap the switch next to Use Data Saver to turn it on.

**Tip:** To see Wi-FI data usage, swipe up from the home screen and tap

Settings > Network & internet > Internet > Non-carrier data usage.

**Note:** Usage information is provided to help you manage your phone. This may not match the amounts charged by your service provider, as they're not measured in the same way.

### Improve battery life

Your phone processes tons of information. Depending on what apps are in use, your phone may use a lot of power.

When your phone is not in use for a period of time, unnecessary background processes are shut down to optimize battery life.


- » To see what's using up battery power, swipe up from the home screen and tap Settings > Battery > Battery usage.
- » To help improve battery life, swipe up from the home screen and tap

  Settings > Battery > Battery Saver, and tap the switch next to Use

  Battery Saver to turn it on. When on, your phone's display changes to

  Dark theme.
- » To limit battery use for apps that you don't use often, swipe up from the home screen and tap Settings > Battery > Adaptive Battery, and turn it on.
- » To charge more efficiently and keep your battery healthy, swipe up from the home screen and tap Settings > Battery > Optimized charging, and turn it on.
- » To protect your battery from being overcharged, swipe up from the home screen and tap Settings > Battery > Overcharge protection, and turn it on.
- » To show battery percentage in status bar, swipe up from the home screen and tap Settings > Battery, then tap the switch next to Battery Percentage to turn it on.

Claim	Public Documentation
	https://developer.android.com/training/basics/network-ops/data-saver:
	Optimize network data usage
	Over the life of a smartphone, the cost of a cellular data plan can easily exceed the cost of the device itself. On Android 7.0 (API level 24) and higher, users can enable Data Saver on a device-wide basis in order to optimize their device's data usage, and use less data. This ability is especially useful when roaming, near the end of the billing cycle, or for a small prepaid data pack.
	When a user enables Data Saver in <b>Settings</b> and the device is on a metered network, the system blocks background data usage and signals apps to use less data in the foreground wherever possible. Users can allow specific apps to use background metered data usage even when Data Saver is turned on.
	Android 7.0 (API level 24) extends the ConnectivityManager API to provide apps with a way to retrieve the user's Data Saver preferences and monitor preference changes. It is considered good practice for apps to check whether the user has enabled Data Saver and make an effort to limit foreground and background data usage.
	Check data saver preferences
	On Android 7.0 (API level 24) and higher, apps can use the ConnectivityManager API to determine what data usage restrictions are being applied. The getRestrictBackgroundStatus() method returns one of the following values:
	RESTRICT_BACKGROUND_STATUS_DISABLED
	Data Saver is disabled.
	RESTRICT_BACKGROUND_STATUS_ENABLED
	The user has enabled Data Saver for this app. Apps should make an effort to limit data usage in the foreground and gracefully handle restrictions to background data usage.
	RESTRICT_BACKGROUND_STATUS_WHITELISTED
	The user has enabled Data Saver but the app is allowed to bypass it. Apps should still make an effort to limit foreground and background data usage.
	Limit data usage whenever the device is connected to a metered network, even if Data Saver is disabled or the app is allowed to bypass it. The following sample code uses <a href="ConnectivityManager.isActiveNetworkMetered">ConnectivityManager.isActiveNetworkMetered</a> () and <a href="ConnectivityManager.getRestrictBackgroundStatus">ConnectivityManager.getRestrictBackgroundStatus</a> () to determine how much data the app should use:
	; https://developer.android.com/training/monitoring-device-state/doze-standby:

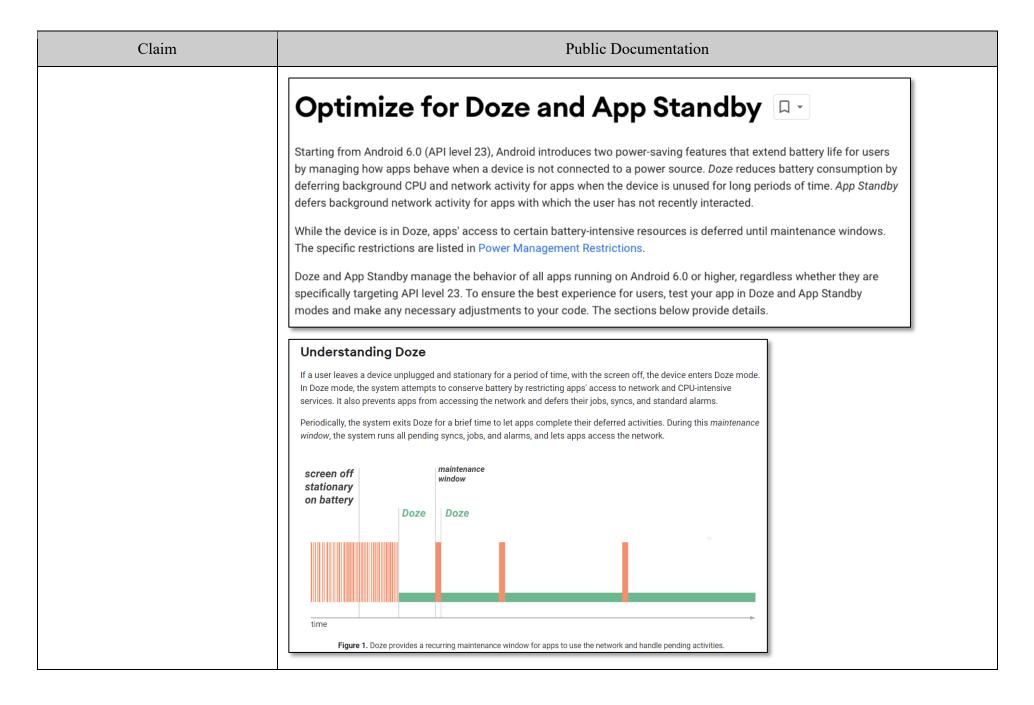

Claim	Public Documentation		
	At the conclusion of each maintenance window, the system again enters Doze, suspending network access and deferring jobs, syncs, and alarms. Over time, the system schedules maintenance windows less and less frequently, helping to reduce battery consumption in cases of longer-term inactivity when the device is not connected to a charger.  As soon as the user wakes the device by moving it, turning on the screen, or connecting a charger, the system exits Doze and all apps return to normal activity.		
	The Doze restriction on network access is also likely to affect your app, especially if the app relies on real-time messages such as tickles or notifications. If your app requires a persistent connection to the network to receive messages, you should use Firebase Cloud Messaging (FCM) if possible.		
	; <a href="https://developer.android.com/topic/performance/appstandby">https://developer.android.com/topic/performance/appstandby</a> :		

### App Standby Buckets 🖳

Android 9 (API level 28) and higher support **App Standby Buckets**. App Standby Buckets help the system prioritize apps' requests for resources based on how recently and how frequently the apps are used. Based on app usage patterns, each app is placed in one of five priority **buckets**. The system limits the device resources available to each app based on which bucket the app is in.

#### **Priority buckets**

The system dynamically assigns each app to a priority bucket, reassigning the apps as needed. The system may rely on a preloaded app that uses machine learning to determine how likely each app is to be used, and assigns apps to the appropriate buckets. If the system app is not present on a device, the system defaults to sorting apps based on how recently they were used. More active apps are assigned to buckets that give the apps higher priority, making more system resources available to the app. In particular, the bucket determines how frequently the app's jobs run, and how often the app can trigger alarms. These restrictions apply only while the device is on battery power; the system does not impose these restrictions on apps while the device is charging.



**Note:** Every manufacturer can set their own criteria for how non-active apps are assigned to buckets. You should not try to influence which bucket your app is assigned to. Instead, focus on making sure your app behaves well in whatever bucket it might be in. Your app can find out what bucket it's currently in by calling <a href="UsageStatsManager.getAppStandbyBucket()">UsageStatsManager.getAppStandbyBucket()</a>.

#### The buckets are:

- 1. Active: App is currently being used or was very recently used.
- Working set: App is in regular use.
- 3. Frequent: App is often used, but not every day.
- 4. Rare: App is not frequently used.
- 5. Restricted: App consumes a great deal of system resources, or may exhibit undesirable behavior.

In addition, there's a special **never** bucket for apps that have been installed but have never been run. The system imposes severe restrictions on these apps.

Claim	Public Documentation		
	; https://developer.android.com/topic/performance/background-optimization; https://developer.android.com/reference/android/app/job/JobScheduler; https://developer.android.com/guide/background/persistent; https://developer.android.com/guide/components/services; https://developer.android.com/guide/components/services; https://developer.android.com/guide/components/services; https://developer.android.com/guide/components/services; https://developer.android.com/reference/java/net/URLConnection; https://developer.android.com/training/articles/security-ssl; https://developer.android.com/guide/topics/media; https://developer.android.com/guide/topics/media; https://developer.android.com/guide/topics/media/platform/mediaplayer; see also https://techshift.net/does-data-saver-apply-to-wi-fi/:  "Does data saver apply to Wi-Fi?  Does data saver affect WiFi? No, it doesn't. Data saver only restricts the apps from using mobile data. While you are on WiFi, your phone's data saver won't affect it."  ; https://www.technipages.com/how-to-give-android-apps-unrestricted-data-access-data-saver-on:  "The Data Saver option is only when you're not on WiFi and affects how you see your content."		
[1e] a differential traffic control policy applicable to at least some Internet service activities by or on behalf of the first one or more applications;	The Accused Instrumentalities comprises "a differential traffic control policy applicable to at least some Internet service activities by or on behalf of the first one or more applications."  For example, Motorola's devices, run the Android Operating System, which includes features such as "Data Saver," "Battery Saver," "Doze Mode," "App Standby," "Adaptive Battery," and/or "JobScheduler" which include policies which apply to at least some activities by or on behalf of applications and/or services. <i>See, e.g.</i> , <a href="https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023">https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023</a> :		


Claim	Public Documentation		
	Addition	al spec details	What's in the box
	Battery Description  Ports  Connectivity  Processor  Operating System  Ram  Maximum Expandable  Memory  Wireless Network  Technology Generations  Supported Email Platforms  Hearing Aid Compatibility  WEA Capable	3800 mAh  USB Type-C  Wi-Fi 802.11 a/b/g/n/ac/k/v/r/ax/Wi-Fi 6e, Bluetooth® 5.3, NFC  Qualcomm of Snapdragon 8+ Gen 1 Mobile Platform  Android  8 GB  0 GB  4G LTE, 5G  Apple Mail, POP3, IMAP4, SMTP, Microsoft® Exchange, AOL, AIM, Yahoo!® Mail, GMail	Motorola razr+ 2023     USB Type-C Cable     Guides     SIM Tool  For WEA capability, see T-Mobile WEA California residents: see the California Proposition 65 WARNING
	Weight	6.56 Ounces	
	Length Height	0.28 6.73	
	Width	2.91	
		8xNzEwNzI3MjU3L2dlbi8xNzEwNzI3MjU3L3NpZ	om/ci/fattach/get/81413275/1686837226/redirect/1/ses- C9mVWc0dzJqVlJvVU92V2lZJTdFNGNwU3JySkJ C1Wng4OUpNTEFsWU50WHF1aEw0YWFSOTc2M3

Claim	Public Documentation
	NWUGRBeEdPRXVyc1A1UGJQVHZmYXhiWEw2dzg2UHdnJTIxJTIx/filename/motorola+razr%2B+- +2023.NA+Retail.UG.en-US.SSC8D89424-B.pdf:

#### Data usage

You can track the amount of data your phone uploads and downloads.

Find it: Swipe up from the home screen and tap Settings > Network & internet > Mobile network > choose a SIM card

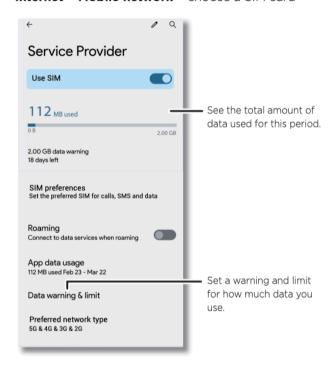

To see a breakdown of which apps are using data, swipe up from the home screen and tap Settings > Network & internet > Mobile network > App data usage. Some apps transfer data in the background when you're not viewing them—to help reduce this type of data usage, swipe up from the home screen and tap Settings > Network & internet > Data Saver, then tap the switch next to Use Data Saver to turn it on.

**Tip:** To see Wi-FI data usage, swipe up from the home screen and tap

Settings > Network & internet > Internet > Non-carrier data usage.

**Note:** Usage information is provided to help you manage your phone. This may not match the amounts charged by your service provider, as they're not measured in the same way.

### Improve battery life

Your phone processes tons of information. Depending on what apps are in use, your phone may use a lot of power.

When your phone is not in use for a period of time, unnecessary background processes are shut down to optimize battery life.


- » To see what's using up battery power, swipe up from the home screen and tap Settings > Battery > Battery usage.
- » To help improve battery life, swipe up from the home screen and tap

  Settings > Battery > Battery Saver, and tap the switch next to Use

  Battery Saver to turn it on. When on, your phone's display changes to

  Dark theme.
- » To limit battery use for apps that you don't use often, swipe up from the home screen and tap Settings > Battery > Adaptive Battery, and turn it on.
- » To charge more efficiently and keep your battery healthy, swipe up from the home screen and tap Settings > Battery > Optimized charging, and turn it on.
- » To protect your battery from being overcharged, swipe up from the home screen and tap Settings > Battery > Overcharge protection, and turn it on.
- » To show battery percentage in status bar, swipe up from the home screen and tap **Settings** > **Battery**, then tap the switch next to **Battery Percentage** to turn it on.

Claim	Public Documentation	
	https://developer.android.com/training/basics/network-ops/data-saver:	
	Optimize network data usage	
	Over the life of a smartphone, the cost of a cellular data plan can easily exceed the cost of the device itself. On Android 7.0 (API level 24) and higher, users can enable Data Saver on a device-wide basis in order to optimize their device's data usage, and use less data. This ability is especially useful when roaming, near the end of the billing cycle, or for a small prepaid data pack.	
	When a user enables Data Saver in <b>Settings</b> and the device is on a metered network, the system blocks background data usage and signals apps to use less data in the foreground wherever possible. Users can allow specific apps to use background metered data usage even when Data Saver is turned on.	
	Android 7.0 (API level 24) extends the ConnectivityManager API to provide apps with a way to retrieve the user's Data Saver preferences and monitor preference changes. It is considered good practice for apps to check whether the user has enabled Data Saver and make an effort to limit foreground and background data usage.	
	Check data saver preferences	
	On Android 7.0 (API level 24) and higher, apps can use the ConnectivityManager API to determine what data usage restrictions are being applied. The <pre>getRestrictBackgroundStatus()</pre> method returns one of the following values:	
	RESTRICT_BACKGROUND_STATUS_DISABLED  Data Saver is disabled.	
	RESTRICT_BACKGROUND_STATUS_ENABLED	
	The user has enabled Data Saver for this app. Apps should make an effort to limit data usage in the foreground and gracefully handle restrictions to background data usage.	
	RESTRICT_BACKGROUND_STATUS_WHITELISTED	
	The user has enabled Data Saver but the app is allowed to bypass it. Apps should still make an effort to limit foreground and background data usage.	
	Limit data usage whenever the device is connected to a metered network, even if Data Saver is disabled or the app is allowed to bypass it. The following sample code uses <a href="ConnectivityManager.isActiveNetworkMetered">ConnectivityManager.isActiveNetworkMetered</a> () and <a href="ConnectivityManager.getRestrictBackgroundStatus">ConnectivityManager.getRestrictBackgroundStatus</a> () to determine how much data the app should use:	
	; <a href="https://developer.android.com/training/monitoring-device-state/doze-standby:">https://developer.android.com/training/monitoring-device-state/doze-standby:</a>	

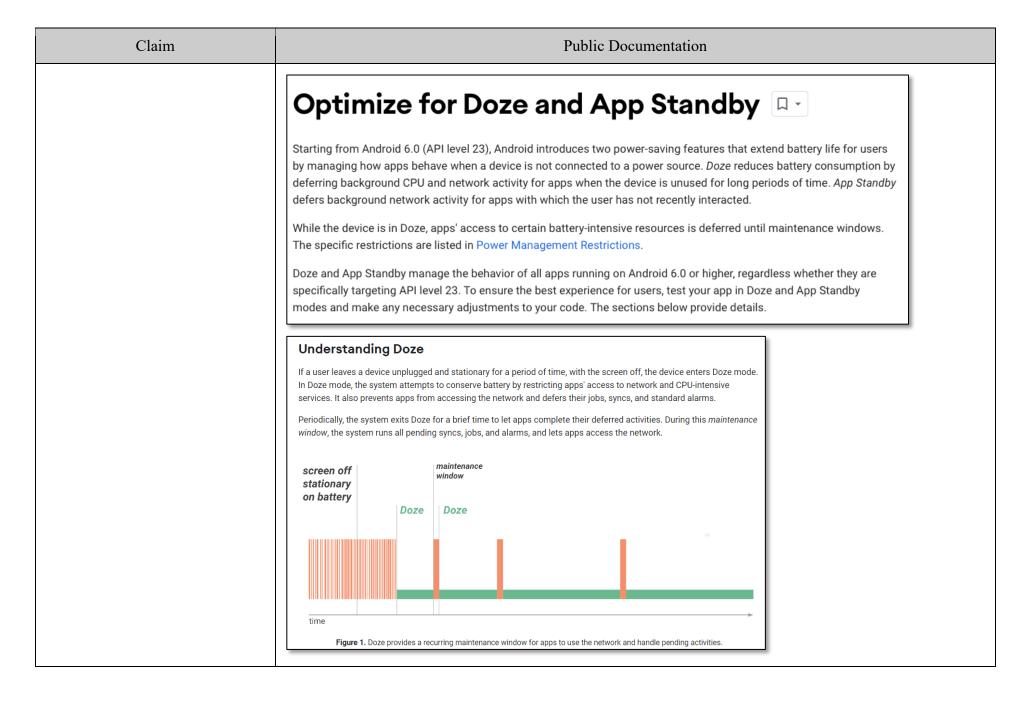

# Case 2:23-cv-00379-JRG-RSP Document 76-11 Filed 08/21/24 Page 27 of 95 PageID #: 4252

Claim	Public Documentation	
	At the conclusion of each maintenance window, the system again enters Doze, suspending network access and deferring jobs, syncs, and alarms. Over time, the system schedules maintenance windows less and less frequently, helping to reduce battery consumption in cases of longer-term inactivity when the device is not connected to a charger.  As soon as the user wakes the device by moving it, turning on the screen, or connecting a charger, the system exits Doze and all apps return to normal activity.	
	The Doze restriction on network access is also likely to affect your app, especially if the app relies on real-time messages such as tickles or notifications. If your app requires a persistent connection to the network to receive messages, you should use Firebase Cloud Messaging (FCM) if possible.	
	; https://developer.android.com/topic/performance/appstandby:	

### App Standby Buckets 🗔

Android 9 (API level 28) and higher support **App Standby Buckets**. App Standby Buckets help the system prioritize apps' requests for resources based on how recently and how frequently the apps are used. Based on app usage patterns, each app is placed in one of five priority **buckets**. The system limits the device resources available to each app based on which bucket the app is in.

#### **Priority buckets**

The system dynamically assigns each app to a priority bucket, reassigning the apps as needed. The system may rely on a preloaded app that uses machine learning to determine how likely each app is to be used, and assigns apps to the appropriate buckets. If the system app is not present on a device, the system defaults to sorting apps based on how recently they were used. More active apps are assigned to buckets that give the apps higher priority, making more system resources available to the app. In particular, the bucket determines how frequently the app's jobs run, and how often the app can trigger alarms. These restrictions apply only while the device is on battery power; the system does not impose these restrictions on apps while the device is charging.



**Note:** Every manufacturer can set their own criteria for how non-active apps are assigned to buckets. You should not try to influence which bucket your app is assigned to. Instead, focus on making sure your app behaves well in whatever bucket it might be in. Your app can find out what bucket it's currently in by calling <a href="UsageStatsManager.getAppStandbyBucket()">UsageStatsManager.getAppStandbyBucket()</a>.

#### The buckets are:

- 1. Active: App is currently being used or was very recently used.
- Working set: App is in regular use.
- 3. Frequent: App is often used, but not every day.
- 4. Rare: App is not frequently used.
- 5. Restricted: App consumes a great deal of system resources, or may exhibit undesirable behavior.

In addition, there's a special **never** bucket for apps that have been installed but have never been run. The system imposes severe restrictions on these apps.

# Case 2:23-cv-00379-JRG-RSP Document 76-11 Filed 08/21/24 Page 29 of 95 PageID #: 4254

Claim	Public Documentation		
	; https://developer.android.com/topic/performance/background-optimization; https://developer.android.com/reference/android/app/job/JobScheduler; https://developer.android.com/guide/background/persistent; https://developer.android.com/guide/components/services; https://developer.android.com/guide/components/services; https://developer.android.com/guide/components/activities/intro-activities; https://developer.android.com/reference/java/net/URLConnection; https://developer.android.com/training/articles/security-ssl; https://developer.android.com/guide/topics/media; https://developer.android.com/guide/topics/media; https://developer.android.com/guide/topics/media/platform/mediaplayer; see also https://techshift.net/does-data-saver-apply-to-wi-fi/:  "Does data saver apply to Wi-Fi?		
	Does data saver affect WiFi? <b>No, it doesn't</b> . Data saver only restricts the apps from using mobile data. While you are on WiFi, your phone's data saver won't affect it."		
	; https://www.technipages.com/how-to-give-android-apps-unrestricted-data-access-data-saver-on:		
	"The Data Saver option is only when you're not on WiFi and affects how you see your content."		
[1f] an interface to allow a user to augment the differential traffic control policy for the first one or more applications but not for the second one or more applications and/or services; and	The Accused Instrumentalities include "an interface to allow a user to augment the differential traffic control policy for the first one or more applications but not for the second one or more applications and/or services."  For example, Motorola's devices, include an interface which allow users to augment policies and settings for some applications and/or services, but not all applications and/or services ( <i>e.g.</i> , system services). <i>See, e.g.</i> , <a href="https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023">https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023</a> :		


Claim	Public Documentation		
	Addition	al spec details	What's in the box
	Battery Description  Ports  Connectivity  Processor  Operating System  Ram  Maximum Expandable  Memory  Wireless Network  Technology Generations  Supported Email Platforms  Hearing Aid Compatibility  WEA Capable	3800 mAh  USB Type-C  Wi-Fi 802.11 a/b/g/n/ac/k/v/r/ax/Wi-Fi 6e, Bluetooth® 5.3, NFC  Qualcomm of Snapdragon 8+ Gen 1 Mobile Platform  Android  8 GB  0 GB  4G LTE, 5G  Apple Mail, POP3, IMAP4, SMTP, Microsoft® Exchange, AOL, AIM, Yahoo!® Mail, GMail	Motorola razr+ 2023     USB Type-C Cable     Guides     SIM Tool  For WEA capability, see T-Mobile WEA California residents: see the California Proposition 65 WARNING
	Weight	6.56 Ounces	
	Length Height	0.28 6.73	
	Width	2.91	
		8xNzEwNzI3MjU3L2dlbi8xNzEwNzI3MjU3L3NpZ	om/ci/fattach/get/81413275/1686837226/redirect/1/ses- C9mVWc0dzJqVlJvVU92V2lZJTdFNGNwU3JySkJ C1Wng4OUpNTEFsWU50WHF1aEw0YWFSOTc2M3

Claim	Public Documentation
	NWUGRBeEdPRXVyc1A1UGJQVHZmYXhiWEw2dzg2UHdnJTIxJTIx/filename/motorola+razr%2B+- +2023.NA+Retail.UG.en-US.SSC8D89424-B.pdf:

#### Data usage

You can track the amount of data your phone uploads and downloads.

Find it: Swipe up from the home screen and tap Settings > Network & internet > Mobile network > choose a SIM card

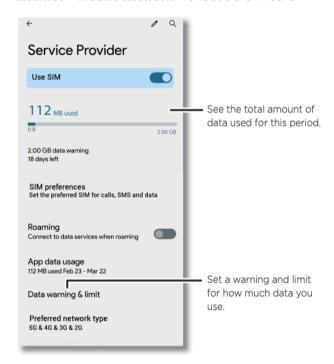

To see a breakdown of which apps are using data, swipe up from the home screen and tap Settings > Network & internet > Mobile network > App data usage. Some apps transfer data in the background when you're not viewing them—to help reduce this type of data usage, swipe up from the home screen and tap Settings > Network & internet > Data Saver, then tap the switch next to Use Data Saver to turn it on.

**Tip:** To see Wi-Fl data usage, swipe up from the home screen and tap

Settings > Network & internet > Internet > Non-carrier data usage.

**Note:** Usage information is provided to help you manage your phone. This may not match the amounts charged by your service provider, as they're not measured in the same way.

### Improve battery life

Your phone processes tons of information. Depending on what apps are in use, your phone may use a lot of power.

When your phone is not in use for a period of time, unnecessary background processes are shut down to optimize battery life.


- » To see what's using up battery power, swipe up from the home screen and tap Settings > Battery > Battery usage.
- » To help improve battery life, swipe up from the home screen and tap

  Settings > Battery > Battery Saver, and tap the switch next to Use

  Battery Saver to turn it on. When on, your phone's display changes to

  Dark theme.
- » To limit battery use for apps that you don't use often, swipe up from the home screen and tap Settings > Battery > Adaptive Battery, and turn it on.
- » To charge more efficiently and keep your battery healthy, swipe up from the home screen and tap Settings > Battery > Optimized charging, and turn it on.
- » To protect your battery from being overcharged, swipe up from the home screen and tap Settings > Battery > Overcharge protection, and turn it on.
- » To show battery percentage in status bar, swipe up from the home screen and tap Settings > Battery, then tap the switch next to Battery Percentage to turn it on.

Claim	Public Documentation		
	https://developer.android.com/training/basics/network-ops/data-saver:		
	Optimize network data usage		
	Over the life of a smartphone, the cost of a cellular data plan can easily exceed the cost of the device itself. On Android 7.0 (API level 24) and higher, users can enable Data Saver on a device-wide basis in order to optimize their device's data usage, and use less data. This ability is especially useful when roaming, near the end of the billing cycle, or for a small prepaid data pack.		
	When a user enables Data Saver in <b>Settings</b> and the device is on a metered network, the system blocks background data usage and signals apps to use less data in the foreground wherever possible. Users can allow specific apps to use background metered data usage even when Data Saver is turned on.		
	Android 7.0 (API level 24) extends the ConnectivityManager API to provide apps with a way to retrieve the user's Data Saver preferences and monitor preference changes. It is considered good practice for apps to check whether the user has enabled Data Saver and make an effort to limit foreground and background data usage.		
	Check data saver preferences		
	On Android 7.0 (API level 24) and higher, apps can use the ConnectivityManager API to determine what data usage restrictions are being applied. The getRestrictBackgroundStatus() method returns one of the following values:		
	RESTRICT_BACKGROUND_STATUS_DISABLED		
	Data Saver is disabled.		
	RESTRICT_BACKGROUND_STATUS_ENABLED		
	The user has enabled Data Saver for this app. Apps should make an effort to limit data usage in the foreground and gracefully handle restrictions to background data usage.		
	RESTRICT_BACKGROUND_STATUS_WHITELISTED		
	The user has enabled Data Saver but the app is allowed to bypass it. Apps should still make an effort to limit foreground and background data usage.		
	Limit data usage whenever the device is connected to a metered network, even if Data Saver is disabled or the app is allowed to bypass it. The following sample code uses <a href="ConnectivityManager.isActiveNetworkMetered">ConnectivityManager.isActiveNetworkMetered</a> () and <a href="ConnectivityManager.getRestrictBackgroundStatus">ConnectivityManager.getRestrictBackgroundStatus</a> () to determine how much data the app should use:		
	: https://developer.android.com/training/monitoring-device-state/doze-standby:		
	; <a href="https://developer.android.com/training/monitoring-device-state/doze-standby:">https://developer.android.com/training/monitoring-device-state/doze-standby:</a>		

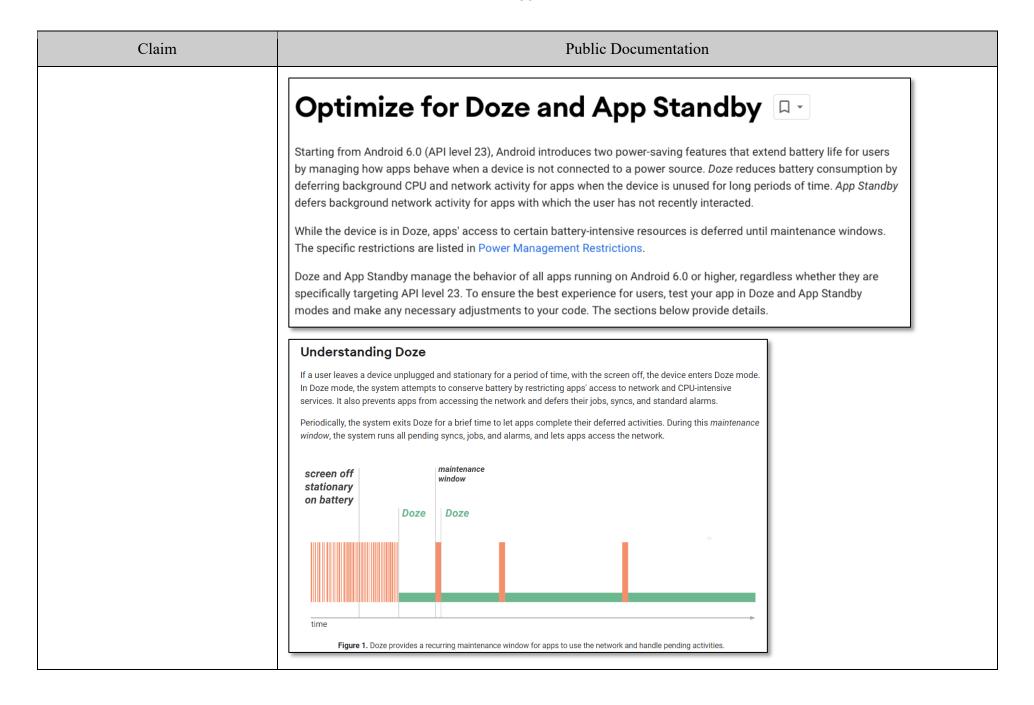

Claim	Public Documentation	
	At the conclusion of each maintenance window, the system again enters Doze, suspending network access and deferring jobs, syncs, and alarms. Over time, the system schedules maintenance windows less and less frequently, helping to reduce battery consumption in cases of longer-term inactivity when the device is not connected to a charger.  As soon as the user wakes the device by moving it, turning on the screen, or connecting a charger, the system exits Doze and all apps return to normal activity.	
	The Doze restriction on network access is also likely to affect your app, especially if the app relies on real-time messages such as tickles or notifications. If your app requires a persistent connection to the network to receive messages, you should use Firebase Cloud Messaging (FCM) if possible.	
	; https://developer.android.com/topic/performance/appstandby:	

## App Standby Buckets 🗔

Android 9 (API level 28) and higher support **App Standby Buckets**. App Standby Buckets help the system prioritize apps' requests for resources based on how recently and how frequently the apps are used. Based on app usage patterns, each app is placed in one of five priority **buckets**. The system limits the device resources available to each app based on which bucket the app is in.

### **Priority buckets**

The system dynamically assigns each app to a priority bucket, reassigning the apps as needed. The system may rely on a preloaded app that uses machine learning to determine how likely each app is to be used, and assigns apps to the appropriate buckets. If the system app is not present on a device, the system defaults to sorting apps based on how recently they were used. More active apps are assigned to buckets that give the apps higher priority, making more system resources available to the app. In particular, the bucket determines how frequently the app's jobs run, and how often the app can trigger alarms. These restrictions apply only while the device is on battery power; the system does not impose these restrictions on apps while the device is charging.



**Note:** Every manufacturer can set their own criteria for how non-active apps are assigned to buckets. You should not try to influence which bucket your app is assigned to. Instead, focus on making sure your app behaves well in whatever bucket it might be in. Your app can find out what bucket it's currently in by calling <a href="UsageStatsManager.getAppStandbyBucket()">UsageStatsManager.getAppStandbyBucket()</a>.

#### The buckets are:

- 1. Active: App is currently being used or was very recently used.
- 2. Working set: App is in regular use.
- 3. Frequent: App is often used, but not every day.
- 4. Rare: App is not frequently used.
- 5. Restricted: App consumes a great deal of system resources, or may exhibit undesirable behavior.

In addition, there's a special **never** bucket for apps that have been installed but have never been run. The system imposes severe restrictions on these apps.

Claim	Public Documentation		
	; <a href="https://developer.android.com/topic/performance/background-optimization;">https://developer.android.com/topic/performance/background-optimization;</a> ; <a href="https://developer.android.com/guide/background/persistent;">https://developer.android.com/guide/background/persistent;</a> ; <a href="https://developer.android.com/guide/components/services;">https://developer.android.com/guide/components/services;</a> ; <a href="https://developer.android.com/guide/components/services;">https://developer.android.com/guide/components/services;</a> ; <a href="https://developer.android.com/reference/java/net/URLConnection;">https://developer.android.com/guide/components/services;</a> ; <a href="https://developer.android.com/guide/topics/media;">https://developer.android.com/guide/topics/media;</a> ; <a href="https://developer.android.com/guide/topics/media/platform/mediaplayer">https://developer.android.com/guide/topics/media/platform/mediaplayer</a> .		
[1g] one or more processors configured to	The Accused Instrumentalities include "one or more processors."  For example, Motorola's devices, including the razr+ 2023, comprise one or more processors, such as a Snapdragon processor. <i>See</i> , <i>e.g.</i> , <a href="https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023">https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023</a> :		

Claim	Public Documentation		
	Addition	nal spec details	What's in the box
	Ports Connectivity Processor	3800 mAh  USB Type-C  Wi-Fi 802.11 a/b/g/n/ac/k/v/r/ax/Wi-Fi 6e, Bluetooth® 5.3, NFC  Qualcomm of Snapdragon 8+ Gen 1 Mobile Platform	Motorola razr+ 2023     USB Type-C Cable     Guides     SIM Tool  For WEA capability, see T-Mobile WEA
	Operating System  Ram  Maximum Expandable  Memory	Android 8 GB 0 GB	California residents: see the California Proposition 65 WARNING
	Wireless Network Technology Generations Supported Email Platform	4G LTE, 5G  s Apple Mail, POP3, IMAP4, SMTP, Microsoft® Exchange, AOL, AIM, Yahoo!® Mail, GMail	
	Hearing Aid Compatibility WEA Capable Mobile Hotspot Capable	M3, T3 true true	
	Frequency	GSM: 850 MHz, 900 MHz, 1800 MHz, 1900 MHz; UMTS: Band I (2100), Band II (1900), Band IV (1700/2100), Band VIII (900); 5G: n2, n5, n7, n12, n13, n14, n25, n26, n29, n30, n38, n41, n48, n66, n70, n71, n77, n78; LTE: 2, 3, 4, 5, 7, 8, 12, 13, 14, 17, 18, 19, 20, 25, 26, 28, 29, 30, 38, 39, 40, 41, 46, 48, 66, 71	
	Weight	6.56 Ounces	
	Length	0.28	
	Height	6.73	
	Width	2.91	

# Case 2:23-cv-00379-JRG-RSP Document 76-11 Filed 08/21/24 Page 40 of 95 PageID #: 4265

Claim	Public Documentation
[1h] classify a wireless network to which the device currently connects in order to communicate data for Internet service activities as at	communicate data for Internet service activities as at least one of a plurality of network types that the device can connect with."
least one of a plurality of network types that the device can connect with,	For example, Motorola's devices, sold and used by T-Mobile classify wireless network connections for communicating internet service activities. <i>See, e.g.</i> , <a href="https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023">https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023</a> :


Claim	Public Documentation		
	Addition	al spec details	What's in the box
	Battery Description  Ports  Connectivity  Processor	3800 mAh  USB Type-C  Wi-Fi 802.11 a/b/g/n/ac/k/v/r/ax/Wi-Fi 6e, Bluetooth® 5.3, NFC  Qualcomm of Snapdragon 8+ Gen 1 Mobile Platform	<ul> <li>Motorola razr+ 2023</li> <li>USB Type-C Cable</li> <li>Guides</li> <li>SIM Tool</li> </ul>
	Operating System Ram Maximum Expandable	Android  8 GB  0 GB	For WEA capability, see <u>T-Mobile WEA</u> California residents: see the California Proposition 65 <b>WARNING</b>
	Memory Wireless Network Technology Generations Supported Email Platforms	4G LTE, 5G Apple Mail, POP3, IMAP4, SMTP, Microsoft® Exchange, AOL, AIM,	
	Hearing Aid Compatibility WEA Capable	Yahoo!® Mail, GMail M3, T3 true	
	Mobile Hotspot Capable Frequency	true  GSM: 850 MHz, 900 MHz, 1800 MHz, 1900 MHz; UMTS: Band I (2100), Band II (1900), Band IV (1700/2100), Band VIII (900); 5G: n2, n5, n7, n12, n13, n14, n25, n26, n29, n30, n38, n41, n48, n66, n70, n71, n77, n78; LTE: 2, 3, 4, 5, 7, 8, 12, 13, 14, 17, 18, 19, 20, 25, 26, 28, 29, 30, 38, 39, 40, 41, 46, 48, 66, 71	
	Weight	6.56 Ounces	
	Length	0.28 6.73	
	Width	2.91	
		<u>8xNzEwNzI3MjU3L2dlbi8xNzEwNzI3MjU3L3NpZ</u>	com/ci/fattach/get/81413275/1686837226/redirect/1/ses- C9mVWc0dzJqVlJvVU92V2lZJTdFNGNwU3JySkJ F1Wng4OUpNTEFsWU50WHF1aEw0YWFSOTc2M3

Claim	Public Documentation
	NWUGRBeEdPRXVyc1A1UGJQVHZmYXhiWEw2dzg2UHdnJTIxJTIx/filename/motorola+razr%2B+-+2023.NA+Retail.UG.en-US.SSC8D89424-B.pdf:

### Data usage

You can track the amount of data your phone uploads and downloads.

Find it: Swipe up from the home screen and tap Settings > Network & internet > Mobile network > choose a SIM card

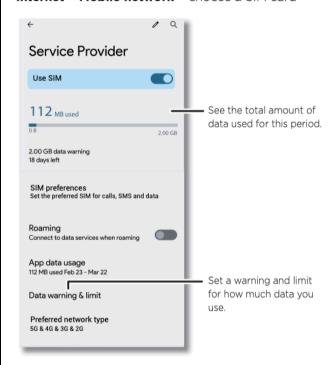

To see a breakdown of which apps are using data, swipe up from the home screen and tap Settings > Network & internet > Mobile network > App data usage. Some apps transfer data in the background when you're not viewing them—to help reduce this type of data usage, swipe up from the home screen and tap Settings > Network & internet > Data Saver, then tap the switch next to Use Data Saver to turn it on.

**Tip:** To see Wi-FI data usage, swipe up from the home screen and tap

Settings > Network & internet > Internet > Non-carrier data usage.

**Note:** Usage information is provided to help you manage your phone. This may not match the amounts charged by your service provider, as they're not measured in the same way.

### Improve battery life

Your phone processes tons of information. Depending on what apps are in use, your phone may use a lot of power.


When your phone is not in use for a period of time, unnecessary background processes are shut down to optimize battery life.

- » To see what's using up battery power, swipe up from the home screen and tap Settings > Battery > Battery usage.
- » To help improve battery life, swipe up from the home screen and tap

  Settings > Battery > Battery Saver, and tap the switch next to Use

  Battery Saver to turn it on. When on, your phone's display changes to

  Dark theme.
- » To limit battery use for apps that you don't use often, swipe up from the home screen and tap Settings > Battery > Adaptive Battery, and turn it on.
- » To charge more efficiently and keep your battery healthy, swipe up from the home screen and tap Settings > Battery > Optimized charging, and turn it on.
- » To protect your battery from being overcharged, swipe up from the home screen and tap Settings > Battery > Overcharge protection, and turn it on.
- » To show battery percentage in status bar, swipe up from the home screen and tap Settings > Battery, then tap the switch next to Battery Percentage to turn it on.

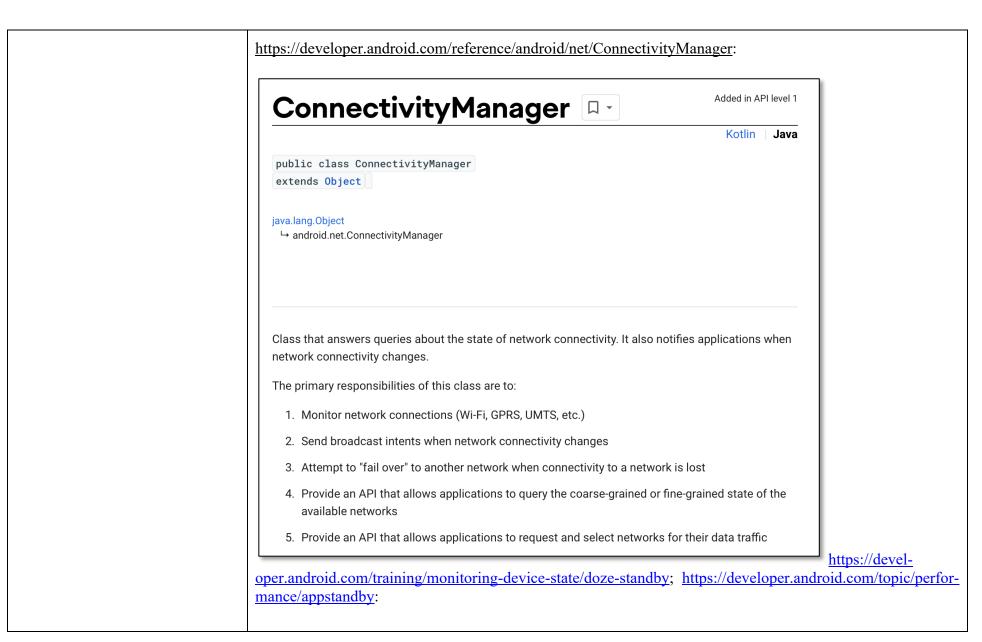

## App Standby Buckets 🗔

Android 9 (API level 28) and higher support **App Standby Buckets**. App Standby Buckets help the system prioritize apps' requests for resources based on how recently and how frequently the apps are used. Based on app usage patterns, each app is placed in one of five priority **buckets**. The system limits the device resources available to each app based on which bucket the app is in.

### **Priority buckets**

The system dynamically assigns each app to a priority bucket, reassigning the apps as needed. The system may rely on a preloaded app that uses machine learning to determine how likely each app is to be used, and assigns apps to the appropriate buckets. If the system app is not present on a device, the system defaults to sorting apps based on how recently they were used. More active apps are assigned to buckets that give the apps higher priority, making more system resources available to the app. In particular, the bucket determines how frequently the app's jobs run, and how often the app can trigger alarms. These restrictions apply only while the device is on battery power; the system does not impose these restrictions on apps while the device is charging.



**Note:** Every manufacturer can set their own criteria for how non-active apps are assigned to buckets. You should not try to influence which bucket your app is assigned to. Instead, focus on making sure your app behaves well in whatever bucket it might be in. Your app can find out what bucket it's currently in by calling <a href="UsageStatsManager.getAppStandbyBucket()">UsageStatsManager.getAppStandbyBucket()</a>.

#### The buckets are:

- 1. Active: App is currently being used or was very recently used.
- Working set: App is in regular use.
- 3. Frequent: App is often used, but not every day.
- 4. Rare: App is not frequently used.
- 5. Restricted: App consumes a great deal of system resources, or may exhibit undesirable behavior.

In addition, there's a special **never** bucket for apps that have been installed but have never been run. The system imposes severe restrictions on these apps.

Claim	Public Documentation		
	Note: Unlike other buckets, these power management restrictions apply to the restricted bucket even when the device is charging. However, restrictions are loosened when the device is charging, idle, and on an unmetered network.		
	; <a href="https://developer.android.com/topic/performance/background-optimization;">https://developer.android.com/topic/performance/background-optimization;</a> ; <a href="https://developer.android.com/guide/background/persistent">https://developer.android.com/guide/background/persistent</a> ; <a href="https://developer.android.com/guide/components/services;">https://developer.android.com/guide/components/services;</a> ; <a href="https://developer.android.com/guide/components/services;">https://developer.android.com/guide/components/services;</a> ; <a href="https://developer.android.com/guide/components/services;">https://developer.android.com/guide/components/services;</a> ; <a href="https://developer.android.com/guide/topics/media;">https://developer.android.com/guide/topics/media;</a> ; <a href="https://developer.android.com/guide/topics/media/platform/mediaplayer;">https://developer.android.com/media;</a> ; <a href="https://developer.android.com/guide/topics/media/platform/mediaplayer;">https://developer.android.com/media</a> ; <a href="https://developer.android.com/guide/topics/media/platform/mediaplayer;">https://developer.android.com/guide/topics/media/platform/mediaplayer;</a>		
	"Does data saver apply to Wi-Fi?		
	Does data saver affect WiFi? <b>No, it doesn't</b> . Data saver only restricts the apps from using mobile data. While you are on WiFi, your phone's data saver won't affect it."		
	; https://www.technipages.com/how-to-give-android-apps-unrestricted-data-access-data-saver-on:		
	"The Data Saver option is only when you're not on WiFi and affects how you see your content."		
[1i] classify whether a particular application capable of both interacting with the user in a user interface foreground of the device, and	The Accused Instrumentalities "classify whether a particular application capable of both interacting with the user in a user interface foreground of the device, and at least some Internet service activities when not interacting with the user in the device user interface foreground."		
at least some Internet service activities when not interacting with the user in the device user interface foreground,	For example, Motorola's devices, sold and used by T-Mobile classify applications and internet service activities in both foreground and background. <i>See, e.g.</i> , <a href="https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023">https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023</a> :		


Claim	Public Documentation		
	Addition	al spec details	What's in the box
	Battery Description  Ports  Connectivity  Processor  Operating System  Ram  Maximum Expandable  Memory  Wireless Network  Technology Generations  Supported Email Platforms  Hearing Aid Compatibility  WEA Capable	3800 mAh  USB Type-C  Wi-Fi 802.11 a/b/g/n/ac/k/v/r/ax/Wi-Fi 6e, Bluetooth® 5.3, NFC  Qualcomm of Snapdragon 8+ Gen 1 Mobile Platform  Android  8 GB  0 GB  4G LTE, 5G  Apple Mail, POP3, IMAP4, SMTP, Microsoft® Exchange, AOL, AIM, Yahoo!® Mail, GMail	Motorola razr+ 2023     USB Type-C Cable     Guides     SIM Tool  For WEA capability, see <u>T-Mobile WEA</u> California residents: see the California Proposition 65 WARNING
	Weight	6.56 Ounces	
	Length Height	0.28 6.73	
	Width	2.91	
		8xNzEwNzI3MjU3L2dlbi8xNzEwNzI3MjU3L3NpZ	om/ci/fattach/get/81413275/1686837226/redirect/1/ses- C9mVWc0dzJqVlJvVU92V2lZJTdFNGNwU3JySkJ F1Wng4OUpNTEFsWU50WHF1aEw0YWFSOTc2M3

Claim	Public Documentation
	NWUGRBeEdPRXVyc1A1UGJQVHZmYXhiWEw2dzg2UHdnJTIxJTIx/filename/motorola+razr%2B+-+2023.NA+Retail.UG.en-US.SSC8D89424-B.pdf:

### Data usage

You can track the amount of data your phone uploads and downloads.

Find it: Swipe up from the home screen and tap Settings > Network & internet > Mobile network > choose a SIM card

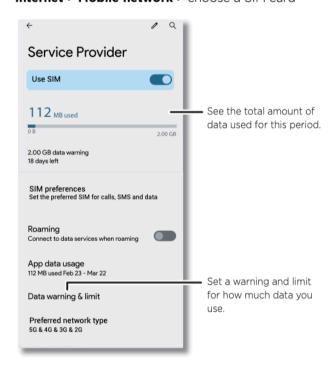

To see a breakdown of which apps are using data, swipe up from the home screen and tap Settings > Network & internet > Mobile network > App data usage. Some apps transfer data in the background when you're not viewing them—to help reduce this type of data usage, swipe up from the home screen and tap Settings > Network & internet > Data Saver, then tap the switch next to Use Data Saver to turn it on.

**Tip:** To see Wi-FI data usage, swipe up from the home screen and tap

Settings > Network & internet > Internet > Non-carrier data usage.

**Note:** Usage information is provided to help you manage your phone. This may not match the amounts charged by your service provider, as they're not measured in the same way.

## Improve battery life

Your phone processes tons of information. Depending on what apps are in use, your phone may use a lot of power.

When your phone is not in use for a period of time, unnecessary background processes are shut down to optimize battery life.


- » To see what's using up battery power, swipe up from the home screen and tap Settings > Battery > Battery usage.
- » To help improve battery life, swipe up from the home screen and tap

  Settings > Battery > Battery Saver, and tap the switch next to Use

  Battery Saver to turn it on. When on, your phone's display changes to

  Dark theme.
- » To limit battery use for apps that you don't use often, swipe up from the home screen and tap Settings > Battery > Adaptive Battery, and turn it on.
- » To charge more efficiently and keep your battery healthy, swipe up from the home screen and tap Settings > Battery > Optimized charging, and turn it on.
- » To protect your battery from being overcharged, swipe up from the home screen and tap Settings > Battery > Overcharge protection, and turn it on.
- » To show battery percentage in status bar, swipe up from the home screen and tap Settings > Battery, then tap the switch next to Battery Percentage to turn it on.

Claim	Public Documentation  https://developer.android.com/training/basics/network-ops/data-saver:		
	Optimize network data usage		
	Over the life of a smartphone, the cost of a cellular data plan can easily exceed the cost of the device itself. On Android 7.0 (API level 24) and higher, users can enable Data Saver on a device-wide basis in order to optimize their device's data usage, and use less data. This ability is especially useful when roaming, near the end of the billing cycle, or for a small prepaid data pack.		
	When a user enables Data Saver in <b>Settings</b> and the device is on a metered network, the system blocks background data usage and signals apps to use less data in the foreground wherever possible. Users can allow specific apps to use background metered data usage even when Data Saver is turned on.		
	Android 7.0 (API level 24) extends the ConnectivityManager API to provide apps with a way to retrieve the user's Data Saver preferences and monitor preference changes. It is considered good practice for apps to check whether the user has enabled Data Saver and make an effort to limit foreground and background data usage.		
	Check data saver preferences		
	On Android 7.0 (API level 24) and higher, apps can use the ConnectivityManager API to determine what data usage restrictions are being applied. The <a href="mailto:getRestrictBackgroundStatus">getRestrictBackgroundStatus</a> () method returns one of the following values:		
	RESTRICT_BACKGROUND_STATUS_DISABLED		
	Data Saver is disabled.		
	RESTRICT_BACKGROUND_STATUS_ENABLED		
	The user has enabled Data Saver for this app. Apps should make an effort to limit data usage in the foreground and gracefully handle restrictions to background data usage.		
	RESTRICT_BACKGROUND_STATUS_WHITELISTED		
	The user has enabled Data Saver but the app is allowed to bypass it. Apps should still make an effort to limit foreground and background data usage.		
	Limit data usage whenever the device is connected to a metered network, even if Data Saver is disabled or the app is allowed to bypass it. The following sample code uses <a href="ConnectivityManager.isActiveNetworkMetered">ConnectivityManager.isActiveNetworkMetered</a> () and <a href="ConnectivityManager.getRestrictBackgroundStatus">ConnectivityManager.getRestrictBackgroundStatus</a> () to determine how much data the app should use:		
	; <a href="https://developer.android.com/training/monitoring-device-state/doze-standby:">https://developer.android.com/training/monitoring-device-state/doze-standby:</a>		

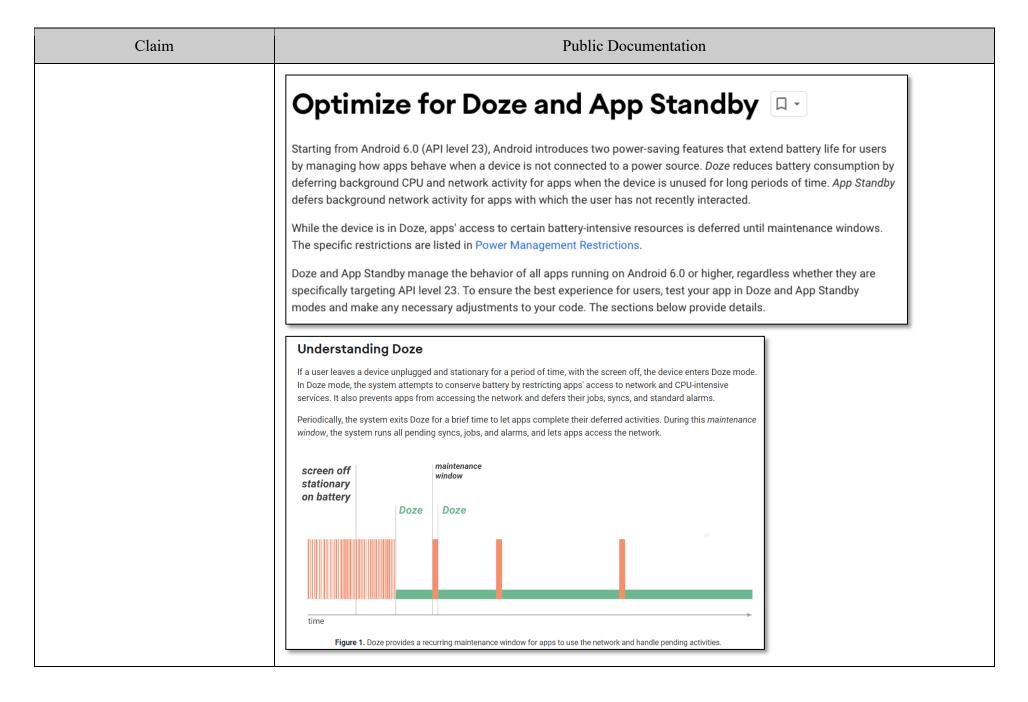

# Case 2:23-cv-00379-JRG-RSP Document 76-11 Filed 08/21/24 Page 54 of 95 PageID #: 4279

Claim	Public Documentation		
	At the conclusion of each maintenance window, the system again enters Doze, suspending network access and deferring jobs, syncs, and alarms. Over time, the system schedules maintenance windows less and less frequently, helping to reduce battery consumption in cases of longer-term inactivity when the device is not connected to a charger.  As soon as the user wakes the device by moving it, turning on the screen, or connecting a charger, the system exits Doze and all apps return to normal activity.		
	The Doze restriction on network access is also likely to affect your app, especially if the app relies on real-time messages such as tickles or notifications. If your app requires a persistent connection to the network to receive messages, you should use Firebase Cloud Messaging (FCM) if possible.		
	; https://developer.android.com/topic/performance/appstandby:		

## App Standby Buckets 🗔

Android 9 (API level 28) and higher support **App Standby Buckets**. App Standby Buckets help the system prioritize apps' requests for resources based on how recently and how frequently the apps are used. Based on app usage patterns, each app is placed in one of five priority **buckets**. The system limits the device resources available to each app based on which bucket the app is in.

### **Priority buckets**

The system dynamically assigns each app to a priority bucket, reassigning the apps as needed. The system may rely on a preloaded app that uses machine learning to determine how likely each app is to be used, and assigns apps to the appropriate buckets. If the system app is not present on a device, the system defaults to sorting apps based on how recently they were used. More active apps are assigned to buckets that give the apps higher priority, making more system resources available to the app. In particular, the bucket determines how frequently the app's jobs run, and how often the app can trigger alarms. These restrictions apply only while the device is on battery power; the system does not impose these restrictions on apps while the device is charging.



**Note:** Every manufacturer can set their own criteria for how non-active apps are assigned to buckets. You should not try to influence which bucket your app is assigned to. Instead, focus on making sure your app behaves well in whatever bucket it might be in. Your app can find out what bucket it's currently in by calling <a href="UsageStatsManager.getAppStandbyBucket()">UsageStatsManager.getAppStandbyBucket()</a>.

#### The buckets are:

- 1. Active: App is currently being used or was very recently used.
- 2. Working set: App is in regular use.
- 3. Frequent: App is often used, but not every day.
- 4. Rare: App is not frequently used.
- 5. Restricted: App consumes a great deal of system resources, or may exhibit undesirable behavior.

In addition, there's a special **never** bucket for apps that have been installed but have never been run. The system imposes severe restrictions on these apps.

Claim	Public Documentation		
	; https://developer.android.com/topic/performance/power/power-details; https://developer.android.com/topic/performance/background-optimization; https://developer.android.com/reference/android/app/job/JobScheduler; https://developer.android.com/guide/background/persistent; https://developer.android.com/guide/components/activities/process-lifecycle:		
	A foreground process is one that is required for what the user is currently doing. Various application components can cause its containing process to be considered foreground in different ways. A process is considered to be in the foreground if any of the following conditions hold:		
	It is running an Activity at the top of the screen that the user is interacting with (its onResume()) method has been called).		
	• It has a BroadcastReceiver that is currently running (its  BroadcastReceiver.onReceive() method is executing).		
	• It has a Service that is currently executing code in one of its callbacks  (Service.onCreate(), Service.onStart(), or Service.onDestroy()).		
	There will only ever be a few such processes in the system, and these will only be killed as a last resort if memory is so low that not even these processes can continue to run. Generally, at this point, the device has reached a memory paging state, so this action is required in order to keep the user interface responsive.		
	; https://developer.android.com/guide/background:		

Claim	Public Documentation		
	Definition of background work		
	An app is running in the <i>background</i> when both the following conditions are satisfied:		
	None of the app's activities are currently visible to the user.		
	The app isn't running any foreground services that started while an activity from the app was visible to the user.		
	Otherwise, the app is running in the foreground.		
	; https://developer.android.com/guide/components/services;		

### **Types of Services**

These are the three different types of services:

#### Foreground

A foreground service performs some operation that is noticeable to the user. For example, an audio app would use a foreground service to play an audio track. Foreground services must display a Notification. Foreground services continue running even when the user isn't interacting with the app.

When you use a foreground service, you must display a notification so that users are actively aware that the service is running. This notification cannot be dismissed unless the service is either stopped or removed from the foreground.

Learn more about how to configure foreground services in your app.



Note: The WorkManager API offers a flexible way of scheduling tasks, and is able to run these jobs as foreground services if needed. In many cases, using WorkManager is preferable to using foreground services directly.

### Background

A background service performs an operation that isn't directly noticed by the user. For example, if an app used a service to compact its storage, that would usually be a background service.



Note: If your app targets API level 26 or higher, the system imposes restrictions on running background services when the app itself isn't in the foreground. In most situations, for example, you shouldn't access location information from the background. Instead, schedule tasks using WorkManager.

#### **Bound**

A service is bound when an application component binds to it by calling bindService(). A bound service offers a client-server interface that allows components to interact with the service, send requests, receive results, and even do so across processes with interprocess communication (IPC). A bound service runs only as long as another application component is bound to it. Multiple components can bind to the service at once, but when all of them unbind, the service is destroyed.

Claim	Public Documentation
	; https://developer.android.com/guide/components/activities/activity-lifecycle:
	Activity-lifecycle concepts
	To navigate transitions between stages of the activity lifecycle, the Activity class provides a core set of six callbacks: onCreate(), onStart(), onResume(), onPause(), onStop(), and onDestroy(). The system invokes each of these callbacks as the activity enters a new state.
	Figure 1 presents a visual representation of this paradigm.
	As the user begins to leave the activity, the system calls methods to dismantle the activity. In some cases, the activity is only partially dismantled and still resides in memory, such as when the user switches to another app.  In these cases, the activity can still come back to the foreground.
	If the user returns to the activity, it resumes from where the user left off. With a few exceptions, apps are restricted from starting activities when running in the background.  User navigates to the activity  App process killed  Another activity comes into the foreground  User returns
	The system's likelihood of killing a given process, along with the activities in it, depends on the state of the activity at the time. For more information on the relationship between state and vulnerability to ejection, see the section about activity state and ejection from memory.  Apps with higher priority need memory  The activity is no longer visible  User navigates to the activity is no longer visible  The activity is finishing or being destroyed by the system
	Depending on the complexity of your activity, you probably don't need to implement all the lifecycle methods. However, it's important that you understand each one and implement those that make your app behave the way users expect.  The probably don't need to implement all the lifecycle on Destroy()  Activity shut down  Figure 1. A simplified illustration of the activity lifecycle.
	; <a href="https://developer.android.com/guide/components/activities/intro-activities">https://developer.android.com/guide/components/activities/intro-activities</a> .

Claim	Public Documentation
[1j] is interacting with the user in the device user interface fore- ground, and	The Accused Instrumentalities comprise one or more applications "interacting with the user in the device user interface foreground."
8	For example, Motorola's devices, sold and used by T-Mobile classify applications and internet service activities in both foreground and background. <i>See, e.g.</i> , <a href="https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023">https://www.t-mobile.com/cell-phone/motorola-razr-plus-2023</a> :


Claim	Public Documentation		
	Addition	al spec details	What's in the box
	Battery Description  Ports  Connectivity  Processor  Operating System  Ram  Maximum Expandable  Memory  Wireless Network  Technology Generations  Supported Email Platforms  Hearing Aid Compatibility  WEA Capable	3800 mAh  USB Type-C  Wi-Fi 802.11 a/b/g/n/ac/k/v/r/ax/Wi-Fi 6e, Bluetooth® 5.3, NFC  Qualcomm of Snapdragon 8+ Gen 1 Mobile Platform  Android  8 GB  0 GB  4G LTE, 5G  Apple Mail, POP3, IMAP4, SMTP, Microsoft® Exchange, AOL, AIM, Yahoo!® Mail, GMail	Motorola razr+ 2023     USB Type-C Cable     Guides     SIM Tool  For WEA capability, see T-Mobile WEA California residents: see the California Proposition 65 WARNING
	Weight	6.56 Ounces	
	Length Height	0.28 6.73	
	Width	2.91	
		8xNzEwNzI3MjU3L2dlbi8xNzEwNzI3MjU3L3NpZ	om/ci/fattach/get/81413275/1686837226/redirect/1/ses- C9mVWc0dzJqVlJvVU92V2lZJTdFNGNwU3JySkJ C1Wng4OUpNTEFsWU50WHF1aEw0YWFSOTc2M3

Claim	Public Documentation
	NWUGRBeEdPRXVyc1A1UGJQVHZmYXhiWEw2dzg2UHdnJTIxJTIx/filename/motorola+razr%2B+- +2023.NA+Retail.UG.en-US.SSC8D89424-B.pdf:

### Data usage

You can track the amount of data your phone uploads and downloads.

Find it: Swipe up from the home screen and tap Settings > Network & internet > Mobile network > choose a SIM card

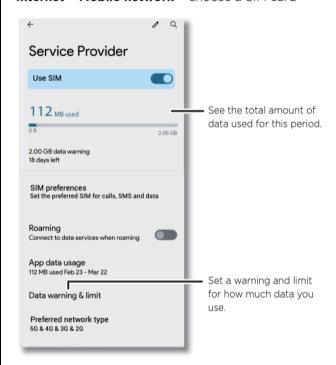

To see a breakdown of which apps are using data, swipe up from the home screen and tap Settings > Network & internet > Mobile network > App data usage. Some apps transfer data in the background when you're not viewing them—to help reduce this type of data usage, swipe up from the home screen and tap Settings > Network & internet > Data Saver, then tap the switch next to Use Data Saver to turn it on.

**Tip:** To see Wi-FI data usage, swipe up from the home screen and tap

Settings > Network & internet > Internet > Non-carrier data usage.

**Note:** Usage information is provided to help you manage your phone. This may not match the amounts charged by your service provider, as they're not measured in the same way.

## Improve battery life

Your phone processes tons of information. Depending on what apps are in use, your phone may use a lot of power.

When your phone is not in use for a period of time, unnecessary background processes are shut down to optimize battery life.


- » To see what's using up battery power, swipe up from the home screen and tap Settings > Battery > Battery usage.
- » To help improve battery life, swipe up from the home screen and tap

  Settings > Battery > Battery Saver, and tap the switch next to Use

  Battery Saver to turn it on. When on, your phone's display changes to

  Dark theme.
- » To limit battery use for apps that you don't use often, swipe up from the home screen and tap Settings > Battery > Adaptive Battery, and turn it on.
- » To charge more efficiently and keep your battery healthy, swipe up from the home screen and tap ② Settings > Battery > Optimized charging, and turn it on.
- » To protect your battery from being overcharged, swipe up from the home screen and tap Settings > Battery > Overcharge protection, and turn it on.
- » To show battery percentage in status bar, swipe up from the home screen and tap Settings > Battery, then tap the switch next to Battery Percentage to turn it on.

Claim	Public Documentation
	https://developer.android.com/training/basics/network-ops/data-saver:
	Optimize network data usage
	Over the life of a smartphone, the cost of a cellular data plan can easily exceed the cost of the device itself. On Android 7.0 (API level 24) and higher, users can enable Data Saver on a device-wide basis in order to optimize their device's data usage, and use less data. This ability is especially useful when roaming, near the end of the billing cycle, or for a small prepaid data pack.
	When a user enables Data Saver in <b>Settings</b> and the device is on a metered network, the system blocks background data usage and signals apps to use less data in the foreground wherever possible. Users can allow specific apps to use background metered data usage even when Data Saver is turned on.
	Android 7.0 (API level 24) extends the ConnectivityManager API to provide apps with a way to retrieve the user's Data Saver preferences and monitor preference changes. It is considered good practice for apps to check whether the user has enabled Data Saver and make an effort to limit foreground and background data usage.
	Check data saver preferences
	On Android 7.0 (API level 24) and higher, apps can use the ConnectivityManager API to determine what data usage restrictions are being applied. The getRestrictBackgroundStatus() method returns one of the following values:
	RESTRICT_BACKGROUND_STATUS_DISABLED
	Data Saver is disabled.
	RESTRICT_BACKGROUND_STATUS_ENABLED
	The user has enabled Data Saver for this app. Apps should make an effort to limit data usage in the foreground and gracefully handle restrictions to background data usage.
	RESTRICT_BACKGROUND_STATUS_WHITELISTED
	The user has enabled Data Saver but the app is allowed to bypass it. Apps should still make an effort to limit foreground and background data usage.
	Limit data usage whenever the device is connected to a metered network, even if Data Saver is disabled or the app is allowed to bypass it. The following sample code uses <a href="ConnectivityManager.isActiveNetworkMetered">ConnectivityManager.isActiveNetworkMetered</a> () and <a href="ConnectivityManager.getRestrictBackgroundStatus">ConnectivityManager.getRestrictBackgroundStatus</a> () to determine how much data the app should use:
	; https://developer.android.com/training/monitoring-device-state/doze-standby:

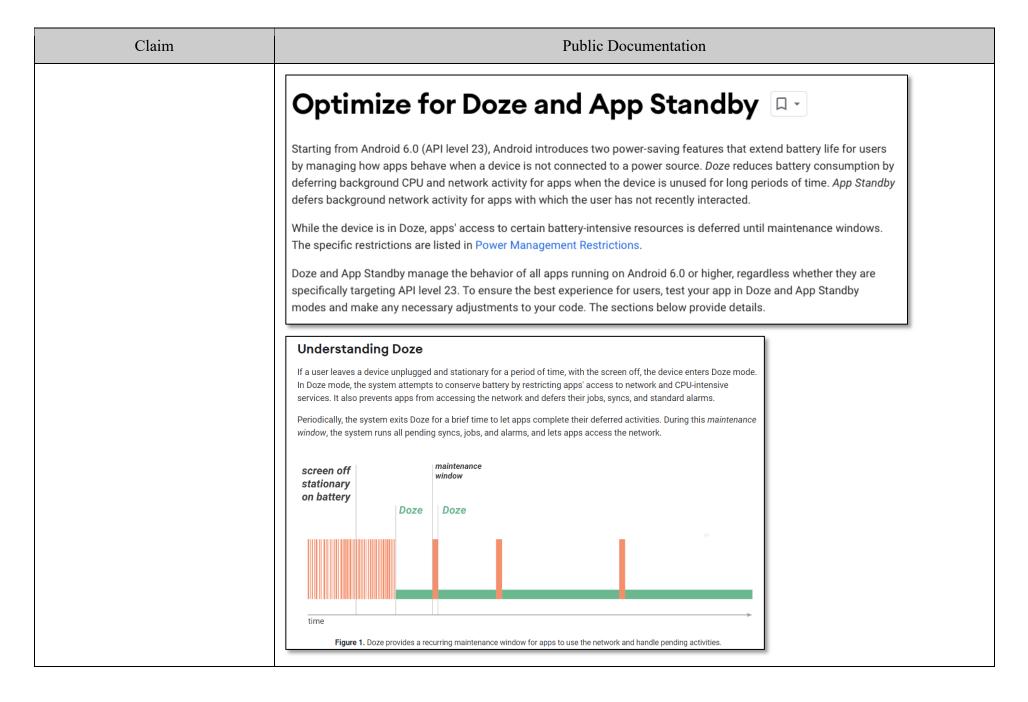

Claim	Public Documentation
	At the conclusion of each maintenance window, the system again enters Doze, suspending network access and deferring jobs, syncs, and alarms. Over time, the system schedules maintenance windows less and less frequently, helping to reduce battery consumption in cases of longer-term inactivity when the device is not connected to a charger.  As soon as the user wakes the device by moving it, turning on the screen, or connecting a charger, the system exits Doze and all apps return to normal activity.
	The Doze restriction on network access is also likely to affect your app, especially if the app relies on real-time messages such as tickles or notifications. If your app requires a persistent connection to the network to receive messages, you should use Firebase Cloud Messaging (FCM) if possible.
	; https://developer.android.com/topic/performance/appstandby:

### App Standby Buckets --

Android 9 (API level 28) and higher support **App Standby Buckets**. App Standby Buckets help the system prioritize apps' requests for resources based on how recently and how frequently the apps are used. Based on app usage patterns, each app is placed in one of five priority **buckets**. The system limits the device resources available to each app based on which bucket the app is in.

### **Priority buckets**

The system dynamically assigns each app to a priority bucket, reassigning the apps as needed. The system may rely on a preloaded app that uses machine learning to determine how likely each app is to be used, and assigns apps to the appropriate buckets. If the system app is not present on a device, the system defaults to sorting apps based on how recently they were used. More active apps are assigned to buckets that give the apps higher priority, making more system resources available to the app. In particular, the bucket determines how frequently the app's jobs run, and how often the app can trigger alarms. These restrictions apply only while the device is on battery power; the system does not impose these restrictions on apps while the device is charging.



**Note:** Every manufacturer can set their own criteria for how non-active apps are assigned to buckets. You should not try to influence which bucket your app is assigned to. Instead, focus on making sure your app behaves well in whatever bucket it might be in. Your app can find out what bucket it's currently in by calling <a href="UsageStatsManager.getAppStandbyBucket()">UsageStatsManager.getAppStandbyBucket()</a>.

#### The buckets are:

- 1. Active: App is currently being used or was very recently used.
- 2. Working set: App is in regular use.
- 3. Frequent: App is often used, but not every day.
- 4. Rare: App is not frequently used.
- 5. Restricted: App consumes a great deal of system resources, or may exhibit undesirable behavior.

In addition, there's a special **never** bucket for apps that have been installed but have never been run. The system imposes severe restrictions on these apps.

Claim	Public Documentation
	; https://developer.android.com/topic/performance/power/power-details; https://developer.android.com/topic/performance/background-optimization; https://developer.android.com/reference/android/app/job/JobScheduler; https://developer.android.com/guide/background/persistent; https://developer.android.com/guide/components/activities/process-lifecycle:
	1. A <b>foreground process</b> is one that is required for what the user is currently doing. Various application components can cause its containing process to be considered foreground in different ways. A process is considered to be in the foreground if any of the following conditions hold:
	<ul> <li>It is running an Activity at the top of the screen that the user is interacting with (its onResume()) method has been called).</li> <li>It has a BroadcastReceiver that is currently running (its</li> </ul>
	BroadcastReceiver.onReceive() method is executing).
	• It has a Service that is currently executing code in one of its callbacks  (Service.onCreate(), Service.onStart(), or Service.onDestroy()).
	There will only ever be a few such processes in the system, and these will only be killed as a last resort if memory is so low that not even these processes can continue to run. Generally, at this point, the device has reached a memory paging state, so this action is required in order to keep the user interface responsive.
	; https://developer.android.com/guide/background:

Claim	Public Documentation	
	Definition of background work	
	An app is running in the background when both the following conditions are satisfied:	
	None of the app's activities are currently visible to the user.	
	The app isn't running any foreground services that started while an activity from the app was visible to the user.	
	Otherwise, the app is running in the foreground.	
	; <a href="https://developer.android.com/guide/components/services">https://developer.android.com/guide/components/services</a> ;	

### **Types of Services**

These are the three different types of services:

#### Foreground

A foreground service performs some operation that is noticeable to the user. For example, an audio app would use a foreground service to play an audio track. Foreground services must display a Notification. Foreground services continue running even when the user isn't interacting with the app.

When you use a foreground service, you must display a notification so that users are actively aware that the service is running. This notification cannot be dismissed unless the service is either stopped or removed from the foreground.

Learn more about how to configure foreground services in your app.



Note: The WorkManager API offers a flexible way of scheduling tasks, and is able to run these jobs as foreground services if needed. In many cases, using WorkManager is preferable to using foreground services directly.

### Background

A background service performs an operation that isn't directly noticed by the user. For example, if an app used a service to compact its storage, that would usually be a background service.



Note: If your app targets API level 26 or higher, the system imposes restrictions on running background services when the app itself isn't in the foreground. In most situations, for example, you shouldn't access location information from the background. Instead, schedule tasks using WorkManager.

#### **Bound**

A service is bound when an application component binds to it by calling bindService(). A bound service offers a client-server interface that allows components to interact with the service, send requests, receive results, and even do so across processes with interprocess communication (IPC). A bound service runs only as long as another application component is bound to it. Multiple components can bind to the service at once, but when all of them unbind, the service is destroyed.

Claim	Public Documentation
	; https://developer.android.com/guide/components/activities/intro-activities.
[1k] selectively allow or deny one or more Internet service activities by or on behalf of the particular application based on whether or not the particular application is one of the first one or more applications, the differential traffic control policy, including any applicable user augmentation of the differential traffic control policy, and the classifications performed by the one or more processors.	For example, Motorola's devices, sold and used by T-Mobile allow or deny internet service activities by or on behalf of applications based on classifications of particular applications and policies. <i>See, e.g.</i> , <a href="https://www.t-">https://www.t-</a>


Claim		Public Documentati	on
	Addition	al spec details	What's in the box
	Battery Description  Ports  Connectivity  Processor  Operating System  Ram  Maximum Expandable  Memory  Wireless Network  Technology Generations  Supported Email Platforms  Hearing Aid Compatibility  WEA Capable	3800 mAh  USB Type-C  Wi-Fi 802.11 a/b/g/n/ac/k/v/r/ax/Wi-Fi 6e, Bluetooth® 5.3, NFC  Qualcomm of Snapdragon 8+ Gen 1 Mobile Platform  Android  8 GB  0 GB  4G LTE, 5G  Apple Mail, POP3, IMAP4, SMTP, Microsoft® Exchange, AOL, AIM, Yahoo!® Mail, GMail	Motorola razr+ 2023     USB Type-C Cable     Guides     SIM Tool  For WEA capability, see <u>T-Mobile WEA</u> California residents: see the California Proposition 65 WARNING
	Weight	6.56 Ounces	
	Length Height	0.28 6.73	
	Width	2.91	
		8xNzEwNzI3MjU3L2dlbi8xNzEwNzI3MjU3L3NpZ	om/ci/fattach/get/81413275/1686837226/redirect/1/ses- C9mVWc0dzJqVlJvVU92V2lZJTdFNGNwU3JySkJ F1Wng4OUpNTEFsWU50WHF1aEw0YWFSOTc2M3

Claim	Public Documentation
	NWUGRBeEdPRXVyc1A1UGJQVHZmYXhiWEw2dzg2UHdnJTIxJTIx/filename/motorola+razr%2B+- +2023.NA+Retail.UG.en-US.SSC8D89424-B.pdf:

### Data usage

You can track the amount of data your phone uploads and downloads.

Find it: Swipe up from the home screen and tap Settings > Network & internet > Mobile network > choose a SIM card

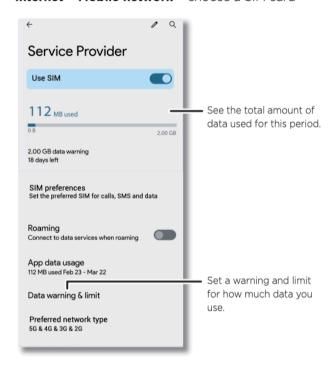

To see a breakdown of which apps are using data, swipe up from the home screen and tap Settings > Network & internet > Mobile network > App data usage. Some apps transfer data in the background when you're not viewing them—to help reduce this type of data usage, swipe up from the home screen and tap Settings > Network & internet > Data Saver, then tap the switch next to Use Data Saver to turn it on.

**Tip:** To see Wi-FI data usage, swipe up from the home screen and tap

Settings > Network & internet > Internet > Non-carrier data usage.

**Note:** Usage information is provided to help you manage your phone. This may not match the amounts charged by your service provider, as they're not measured in the same way.

### Improve battery life

Your phone processes tons of information. Depending on what apps are in use, your phone may use a lot of power.

When your phone is not in use for a period of time, unnecessary background processes are shut down to optimize battery life.


- » To see what's using up battery power, swipe up from the home screen and tap Settings > Battery > Battery usage.
- » To help improve battery life, swipe up from the home screen and tap

  Settings > Battery > Battery Saver, and tap the switch next to Use

  Battery Saver to turn it on. When on, your phone's display changes to

  Dark theme.
- » To limit battery use for apps that you don't use often, swipe up from the home screen and tap Settings > Battery > Adaptive Battery, and turn it on.
- » To charge more efficiently and keep your battery healthy, swipe up from the home screen and tap Settings > Battery > Optimized charging, and turn it on.
- » To protect your battery from being overcharged, swipe up from the home screen and tap Settings > Battery > Overcharge protection, and turn it on.
- » To show battery percentage in status bar, swipe up from the home screen and tap Settings > Battery, then tap the switch next to Battery Percentage to turn it on.

Claim	Public Documentation
	https://developer.android.com/training/basics/network-ops/data-saver:
	Optimize network data usage
	Over the life of a smartphone, the cost of a cellular data plan can easily exceed the cost of the device itself. On Android 7.0 (API level 24) and higher, users can enable Data Saver on a device-wide basis in order to optimize their device's data usage, and use less data. This ability is especially useful when roaming, near the end of the billing cycle, or for a small prepaid data pack.
	When a user enables Data Saver in <b>Settings</b> and the device is on a metered network, the system blocks background data usage and signals apps to use less data in the foreground wherever possible. Users can allow specific apps to use background metered data usage even when Data Saver is turned on.
	Android 7.0 (API level 24) extends the ConnectivityManager API to provide apps with a way to retrieve the user's Data Saver preferences and monitor preference changes. It is considered good practice for apps to check whether the user has enabled Data Saver and make an effort to limit foreground and background data usage.
	Check data saver preferences
	On Android 7.0 (API level 24) and higher, apps can use the ConnectivityManager API to determine what data usage restrictions are being applied. The getRestrictBackgroundStatus() method returns one of the following values:
	RESTRICT_BACKGROUND_STATUS_DISABLED
	Data Saver is disabled.
	RESTRICT_BACKGROUND_STATUS_ENABLED
	The user has enabled Data Saver for this app. Apps should make an effort to limit data usage in the foreground and gracefully handle restrictions to background data usage.
	RESTRICT_BACKGROUND_STATUS_WHITELISTED
	The user has enabled Data Saver but the app is allowed to bypass it. Apps should still make an effort to limit foreground and background data usage.
	Limit data usage whenever the device is connected to a metered network, even if Data Saver is disabled or the app is allowed to bypass it. The following sample code uses <a href="ConnectivityManager.isActiveNetworkMetered">ConnectivityManager.isActiveNetworkMetered</a> () and <a href="ConnectivityManager.getRestrictBackgroundStatus">ConnectivityManager.getRestrictBackgroundStatus</a> () to determine how much data the app should use:
	; https://developer.android.com/training/monitoring-device-state/doze-standby:

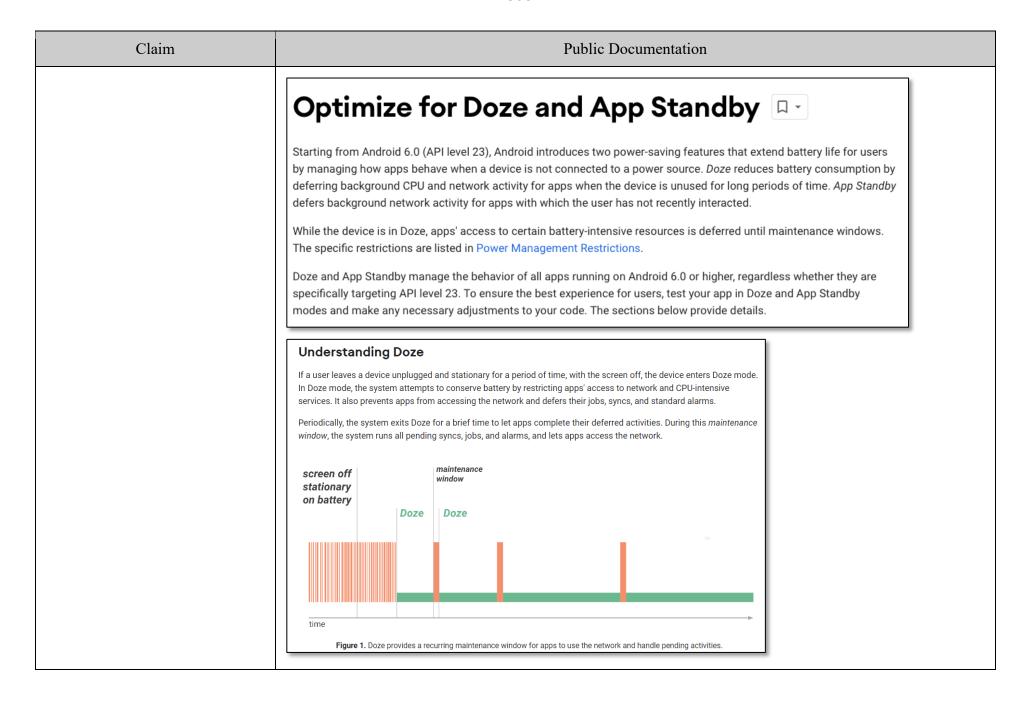

Claim	Public Documentation
	At the conclusion of each maintenance window, the system again enters Doze, suspending network access and deferring jobs, syncs, and alarms. Over time, the system schedules maintenance windows less and less frequently, helping to reduce battery consumption in cases of longer-term inactivity when the device is not connected to a charger.  As soon as the user wakes the device by moving it, turning on the screen, or connecting a charger, the system exits Doze and all apps return to normal activity.
	The Doze restriction on network access is also likely to affect your app, especially if the app relies on real-time messages such as tickles or notifications. If your app requires a persistent connection to the network to receive messages, you should use Firebase Cloud Messaging (FCM) if possible.
	; https://developer.android.com/topic/performance/appstandby:

### App Standby Buckets --

Android 9 (API level 28) and higher support **App Standby Buckets**. App Standby Buckets help the system prioritize apps' requests for resources based on how recently and how frequently the apps are used. Based on app usage patterns, each app is placed in one of five priority **buckets**. The system limits the device resources available to each app based on which bucket the app is in.

### **Priority buckets**

The system dynamically assigns each app to a priority bucket, reassigning the apps as needed. The system may rely on a preloaded app that uses machine learning to determine how likely each app is to be used, and assigns apps to the appropriate buckets. If the system app is not present on a device, the system defaults to sorting apps based on how recently they were used. More active apps are assigned to buckets that give the apps higher priority, making more system resources available to the app. In particular, the bucket determines how frequently the app's jobs run, and how often the app can trigger alarms. These restrictions apply only while the device is on battery power; the system does not impose these restrictions on apps while the device is charging.



**Note:** Every manufacturer can set their own criteria for how non-active apps are assigned to buckets. You should not try to influence which bucket your app is assigned to. Instead, focus on making sure your app behaves well in whatever bucket it might be in. Your app can find out what bucket it's currently in by calling <a href="UsageStatsManager.getAppStandbyBucket()">UsageStatsManager.getAppStandbyBucket()</a>.

#### The buckets are:

- 1. Active: App is currently being used or was very recently used.
- Working set: App is in regular use.
- 3. Frequent: App is often used, but not every day.
- 4. Rare: App is not frequently used.
- 5. Restricted: App consumes a great deal of system resources, or may exhibit undesirable behavior.

In addition, there's a special **never** bucket for apps that have been installed but have never been run. The system imposes severe restrictions on these apps.


Claim	Public Documentation
	; <a href="https://developer.android.com/topic/performance/power/power-details">https://developer.android.com/topic/performance/background-optimization;</a> ; <a href="https://developer.android.com/reference/an-droid/app/job/JobScheduler">https://developer.android.com/reference/an-droid/app/job/JobScheduler</a> ; <a href="https://developer.android.com/guide/background/persistent">https://developer.android.com/guide/background/persistent</a> ; <a href="https://developer.android.com/guide/background">https://developer.android.com/guide/background</a> ; <a href="https://developer.android.com/spie/android-9.0">https://developer.android.com/guide/background</a> ; <a href="https://developer.android.com/spie/android-9.0">https://developer.android.com/spie/android-9.0</a> ; <a href="https://developer.android.com/spie/android-9.0">https://developer.android.com/spie/android.com/spie/android.com/spie/android.com/spie/android.com/spie/android.com/spie/android.com/spie/android.com/spie/android.com/spie/android.com/spie/android.com/spie/android.com/spie/android.com/spie/android.com/spie/android.com/spie/android.com/spie/android.com/spie/android.com/spie/android.com/spie/andro</a>
2. The wireless end-user device of claim 1, wherein based on the differential traffic control policy the one or more processors selectively deny one or more Internet service activities by or on behalf of the particular application when the particular application is one of the first one or more applications, the classified wireless network is a WWAN type, and the particular application is classified as not interacting with the user in the device user interface foreground.	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein based on the differential traffic control policy the one or more processors selectively deny one or more Internet service activities by or on behalf of the particular application when the particular application is one of the first one or more applications, the classified wireless network is a WWAN type, and the particular application is classified as not interacting with the user in the device user interface foreground."  See, for example, the disclosures identified for claim 1.
3. The wireless end-user device of claim 2, wherein the one or more processors are further configured to override the selective denial of one or more Internet service activities by or on behalf of the particular application when the user has augmented the differential traffic control policy so as to indicate that	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 2, wherein the one or more processors are further configured to override the selective denial of one or more Internet service activities by or on behalf of the particular application when the user has augmented the differential traffic control policy so as to indicate that Internet service activities are allowable when the classified wireless network is the WWAN type, and the particular application is classified as not interacting with the user in the device user interface foreground."  See, for example, the disclosures identified for claims 1-2.

Claim	Public Documentation
Internet service activities are allowable when the classified wireless network is the WWAN type, and the particular application is classified as not interacting with the user in the device user interface foreground.	
4. The wireless end-user device of claim 2, wherein based on the differential traffic control policy the one or more processors selectively allow one or more Internet service activities by or on behalf of the particular application when the particular application is one of the first one or more applications, the classified wireless network is the WWAN type, and the particular application is classified as interacting with the user in the device user interface foreground.	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 2, wherein based on the differential traffic control policy the one or more processors selectively allow one or more Internet service activities by or on behalf of the particular application when the particular application is one of the first one or more applications, the classified wireless network is the WWAN type, and the particular application is classified as interacting with the user in the device user interface foreground."  See, for example, the disclosures identified for claims 1-2.
5. The wireless end-user device of claim 1, wherein based on the differential traffic control policy the one or more processors selectively allow one or more Internet service activities by or on behalf of a second particular application and/or service when the second particular application and/or service is one of the second one or	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein based on the differential traffic control policy the one or more processors selectively allow one or more Internet service activities by or on behalf of a second particular application and/or service when the second particular application and/or service is one of the second one or more applications and/or services and the classified wireless network is the WWAN type."  See, for example, the disclosures identified for claim 1.

Claim	Public Documentation
more applications and/or services and the classified wireless network is the WWAN type.	
6. The wireless end-user device of claim 1, wherein the one or more processors are configured to classify that the particular application is interacting with the user in the device user interface foreground when the user of the device is directly interacting with that application or perceiving any benefit from that application.	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein the one or more processors are configured to classify that the particular application is interacting with the user in the device user interface foreground when the user of the device is directly interacting with that application or perceiving any benefit from that application."  See, for example, the disclosures identified for claim 1.
7. The wireless end-user device of claim 1, wherein the user interface is further to provide the user of the device with information regarding why the differential traffic control policy is applied to the particular application.	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein the user interface is further to provide the user of the device with information regarding why the differential traffic control policy is applied to the particular application."  See, for example, the disclosures identified for claim 1.
8. The wireless end-user device of claim 1, wherein the differential traffic control policy is part of a multimode profile having different policies for different ones of the network types.	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein the differential traffic control policy is part of a multimode profile having different policies for different ones of the network types."  See, for example, the disclosures identified for claim 1.
9. The wireless end-user device of claim 8, wherein the one or more processors are further configured	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 8, wherein the one or more processors are further configured to select a traffic control policy from the multimode profile based at least in part on the classified wireless network type."

Claim	Public Documentation
to select a traffic control policy from the multimode profile based at least in part on the classified wireless network type.	See, for example, the disclosures identified for claims 1 and 8.
10. The wireless end-user device of claim 9, wherein the one or more processors are further configured to, when the classified wireless network type is at least one type of WLAN, select the traffic control policy from the multimode profile based at least in part on a type of network connection from the WLAN to the Internet.	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 9, wherein the one or more processors are further configured to, when the classified wireless network type is at least one type of WLAN, select the traffic control policy from the multimode profile based at least in part on a type of network connection from the WLAN to the Internet."  See, for example, the disclosures identified for claim 1 and 9.
11. The wireless end-user device of claim 1, wherein the plurality of network types include three or more of 2G, 3G, 4G, home, roaming, and WiFi.	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein the plurality of network types include three or more of 2G, 3G, 4G, home, roaming, and WiFi."  See, for example, the disclosures identified for claim 1.
12. The wireless end-user device of claim 1, the one or more processors further configured to receive an update to at least a portion of the differential traffic control policy list from a network element.	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, the one or more processors further configured to receive an update to at least a portion of the differential traffic control policy list from a network element."  See, for example, the disclosures identified for claim 1.  As yet another example, the one or more processors are configured to receive portions of policies from a network element. See, e.g., https://www.t-mobile.com/cell-phone-plans:

### Case 2:23-cv-00379-JRG-RSP Document 76-11 Filed 08/21/24 Page 85 of 95 PageID #: 4310

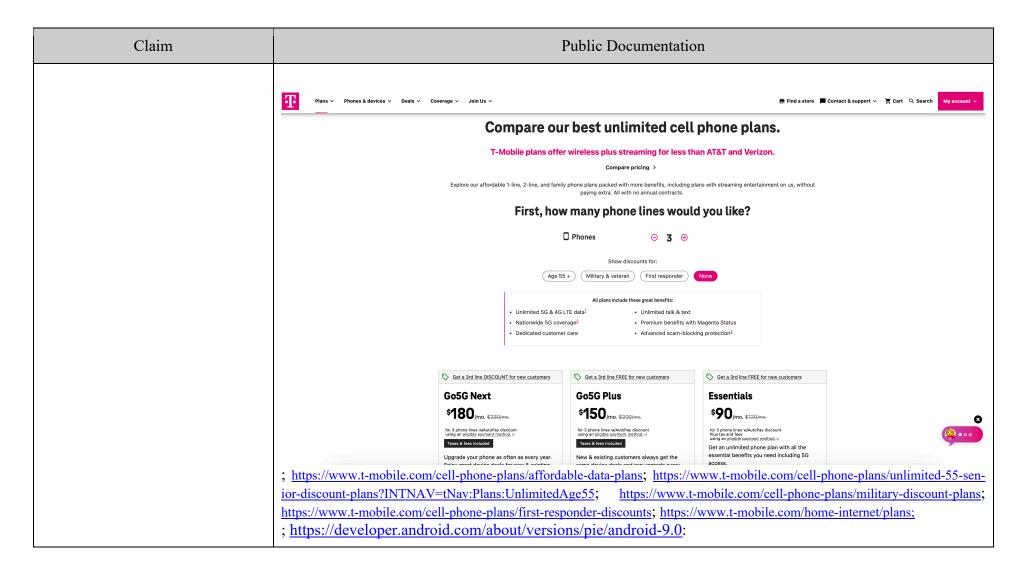

Claim	Public Documentation
	Data cost sensitivity in JobScheduler
	Beginning in Android 9, JobScheduler can use network status signals provided by carriers to improve the handling of network-related jobs.
	Jobs can declare their estimated data size, signal prefetching, and specify detailed network requirements.  JobScheduler then manages work according to the network status. For example, when the network signals that it is congested, JobScheduler might defer large network requests. When on an unmetered network, JobScheduler can run prefetch jobs to improve the user experience, such as by prefetching headlines.
	When adding jobs, make sure to use <pre>setEstimatedNetworkBytes()</pre> , <pre>setPrefetch()</pre> , and <pre>setRequiredNetwork()</pre> when appropriate to help JobScheduler handle the work properly. When your job executes, be sure to use the <pre>Network</pre> object returned by JobParameters.getNetwork(). Otherwise you'll implicitly use the device's default network which may not meet your requirements, causing unintended data usage.  ; <pre>https://developer.android.com/training/basics/network-ops/reading-network-state;</pre> <pre>https://developer.android.com/reference/an-</pre>
	droid/net/NetworkCapabilities.
13. The wireless end-user device of claim 1, wherein the plurality of network types include a roaming WWAN type and a home WWAN type, and the one or more proces-	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein the plurality of network types include a roaming WWAN type and a home WWAN type, and the one or more processors are to apply the differential traffic control policy to one of but not both of the roaming WWAN type and the home WWAN type."
sors are to apply the differential traffic control policy to one of but not both of the roaming WWAN type and the home WWAN type.	See, for example, the disclosures identified for claim 1.  For further example, the policy can be based on roaming on a WWAN network. See, e.g., <a href="https://www.t-mo-bile.com/support/coverage/domestic-roaming-data">https://www.t-mo-bile.com/support/coverage/domestic-roaming-data</a> :

SUPPORT > COVERAGE

### **Domestic roaming data**

Data works a little differently when connected outside the T-Mobile network in the U.S. T-Mobile continues to invest billions in expanding network coverage and improving its network speed and performance. In locations in the U.S. where we do not yet have network coverage, we partner with other networks.

#### On this page:

- How it works
- · How much domestic roaming data do you get?
- · Check and reduce data use
- · What happens when your domestic roaming data is used
- FAQs

#### How it works

When you travel outside of T-Mobile's U.S. network areas, your phone automatically switches to use one of our wireless network partners where available when you have data roaming enabled.

- · Check out our map of the network and roaming areas.
- T-Mobile coordinates with these partners to give our customers connectivity outside of our network. T-Mobile does not charge an additional fee for this
  service, but because we do not own these networks, there are limitations to data use.
- There may be times when your device still attempts to roam on another U.S. wireless network, even when you're within the T-Mobile coverage area. If you'd like to limit this, try the tips to reduce data usage.

#### How to know if you're roaming domestically

The best way to check your active network is to go into the phone settings and check for the mobile network or phone status options. The process varies by device, and you can find it in your user guide.

- When roaming on these networks, you'll receive free usage alerts via text message to alert you if you approach/reach your available domestic roaming
  data
- You can review the T-Mobile coverage map prior to traveling to determine if your destination is within a T-Mobile or partner network area.

# Case 2:23-cv-00379-JRG-RSP Document 76-11 Filed 08/21/24 Page 88 of 95 PageID #: 4313

Claim	Public Documentation
	; <a href="https://www.t-mobile.com/support/coverage/international-roaming-services">https://www.t-mobile.com/support/coverage/international-roaming-services</a> .
14. The wireless end-user device of claim 1, wherein the plurality of network types include the WWAN type and a WLAN type, and the one or more processors are to apply the differential traffic control policy to one of but not both of the WWAN type and the WLAN type.	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein the plurality of network types include the WWAN type and a WLAN type, and the one or more processors are to apply the differential traffic control policy to one of but not both of the WWAN type and the WLAN type."  See, for example, the disclosures identified for claim 1.
15. The wireless end-user device of claim 1, wherein the one or more processors are further configured to dynamically change the application of the differential traffic control policy based on a power state of the device.	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein the one or more processors are further configured to dynamically change the application of the differential traffic control policy based on a power state of the device."  See, for example, the disclosures identified for claim 1.
16. The wireless end-user device of claim 1, wherein the one or more processors are further configured to dynamically change the application of the differential traffic control policy based on a device usage state.	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein the one or more processors are further configured to dynamically change the application of the differential traffic control policy based on a device usage state."  See, for example, the disclosures identified for claim 1.
17. The wireless end-user device of claim 1, wherein the one or more processors are further configured to dynamically change the applica-	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein the one or more processors are further configured to dynamically change the application of the differential traffic control policy based on power control state changes for one or more of the modems."

Claim	Public Documentation
tion of the differential traffic control policy based on power control state changes for one or more of the modems.	See, for example, the disclosures identified for claim 1.  As a further example, the one or more processors change policies based on power control state changes of modems. See, e.g., https://developer.android.com/training/connectivity/network-access-optimization.  Optimize network access  Using the wireless radio to transfer data is potentially one of your app's most significant sources of battery drain. To minimize the battery drain associated with network activity, it's critical that you understand how your connectivity model will affect the underlying radio hardware.  This section introduces the wireless radio state machine and explains how your app's connectivity model interacts with it. It then offers several techniques which, when followed, will help minimize the effect of your app's data consumption on the battery.

#### The radio state machine

The wireless radio on your user's device has built-in power-saving features that help minimize the amount of battery power it consumes. When fully active, the wireless radio consumes significant power, but when inactive or in standby, the radio consumes very little power.

One important factor to remember is that the radio cannot move from standby to fully active instantaneously. There is a latency period associated with "powering up" the radio. So the battery transitions from higher energy states to lower energy states slowly in order to conserve power when not in use while attempting to minimize the latency associated with "powering up" the radio.

The state machine for a typical 3G network radio consists of three energy states:

- Full power: Used when a connection is active, allowing the device to transfer data at its highest possible rate.
- Low power: An intermediate state that cuts battery power consumption by around 50%.
- . Standby: The minimal power-consuming state during which no network connection is active.

While the low and standby states drain significantly less battery, they also introduce significant latency to network requests. Returning to full power from the low state takes around 1.5 seconds, and moving from standby to full power can take over 2 seconds.

To minimize latency, the state machine uses a delay to postpone the transition to lower energy states. Figure 1 uses AT&T's timings for a typical 3G radio.




Figure 1. Typical 3G wireless radio state machine.

The radio state machine on each device, particularly the associated transition delay ("tail time") and startup latency, will vary based on the wireless radio technology employed (3G, LTE, 5G, and so on) and is defined and configured by the carrier network over which the device is operating.

This page describes a representative state machine for a typical 3G wireless radio, based on data provided by AT&T. However, the general principles and resulting best practices are applicable for all wireless radio implementations.

This approach is particularly effective for typical mobile web browsing as it prevents unwelcome latency while users browse the web. The relatively low tail-time also ensures that once a browsing session has finished, the radio can move to a lower energy state.

Unfortunately, this approach can lead to inefficient apps on modern smartphone operating systems like Android, where apps run both in the foreground (where latency is important) and in the background (where battery life should be prioritized).

### How apps impact the radio state machine Every time you create a new network connection, the radio transitions to the full power state. In the case of the typical 3G radio state machine described earlier, it will remain at full power for the duration of your transfer-plus an additional 5 seconds of tail time-followed by 12 seconds at the low energy state. So for a typical 3G device, every data transfer session will cause the radio to draw energy for at least 18 seconds. In practice, this means that an app which makes a one second data transfer, three times a minute, will keep the wireless radio perpetually active, moving it back to high power just as it is entering standby mode. Transmit for Transmit for Low Power +12s Total 18 seconds Total 18 seconds Total 18 seconds Figure 2. Relative wireless radio power use for one-second transfer running three times every minute. Figure excludes "power up" latency between runs. By comparison, if the same app bundled its data transfers, running a single three-second transfer every minute, this would keep the radio in the high-power state for a total of only 20 seconds each minute. This would allow the radio to be on standby for 40 seconds of every minute, resulting in a significant reduction in battery consumption. Transmit for 3 seconds Low Power +12s Radio Standby Total 20 seconds Total 40 seconds

Figure 3. Relative wireless radio power use for three second transfers running once every minute.

### **Optimization techniques**

Now that you understand how network access affects battery life, let's talk about a few things that you can do to help reduce battery drain, while also providing a fast and fluid user experience.

#### Bundle data transfers

As stated in the previous section, bundling your data transfers so that you're transferring more data less often is one of the best ways to improve battery efficiency.

Of course, this is not always possible to do if your app needs to receive or send data immediately in response to a user action. You can mitigate this by anticipating and prefetching data. Other scenarios, such as sending logs or analytics to a server and other, non-urgent, app-initiated data transfers, lend themselves very well to batching and bundling. See Optimizing app-initiated tasks for tips on scheduling background network transfers.

#### Prefetch data

Prefetching data is another effective way to reduce the number of independent data transfer sessions that your app runs. With prefetching, when the user performs an action in your app, the app anticipates which data will most likely be needed for the next series of user actions and fetches that data in a single burst, over a single connection, at full capacity.

By front-loading your transfers, you reduce the number of radio activations required to download the data. As a result, you not only conserve battery life, but also improve the latency, lower the required bandwidth, and reduce download times.

Prefetching also provides an improved user experience by minimizing in-app latency caused by waiting for downloads to complete before performing an action or viewing data.

Claim	Public Documentation	
	Check for connectivity before making requests  Searching for a cell signal is one of the most power-draining operations on a mobile device. A best practice for user-initiated requests is to first check for a connection using ConnectivityManager, as shown in Monitor connectivity status and connection metering. If there's no network, the app can save battery by not forcing the mobile radio to search. The request can then be scheduled and performed in a batch with other requests when a connection is made.  Pool connections  An additional strategy that can help in addition to batching and prefetching, is to pool your app's network connections. It's generally more efficient to reuse existing network connections than it is to initiate new ones. Reusing connections also allows the network to more-intelligently react to congestion and related network data issues.  HttpURLConnection and most HTTP clients, such as OkHttp 2, enable connection-pooling by default, and reusing the same connection for multiple requests.	
18. The wireless end-user device of claim 1, wherein the differential traffic control policy defines that the first one or more applications can only access a first one of the network types during particular time windows.	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein the differential traffic control policy defines that the first one or more applications can only access a first one of the network types during particular time windows."  See, for example, the disclosures identified for claim 1.	
19. The wireless end-user device of claim 1, wherein the one or more processors are configured to classify that the particular application is interacting with the user in the device user interface foreground based on a state of user interface priority for the application.	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein the one or more processors are configured to classify that the particular application is interacting with the user in the device user interface foreground based on a state of user interface priority for the application."  See, for example, the disclosures identified for claim 1.	

Claim	Public Documentation
20. The wireless end-user device of claim 1, wherein the second one or more applications are not subject to a differential network access control that is applicable to the first one or more applications.	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein the second one or more applications are not subject to a differential network access control that is applicable to the first one or more applications."  See, for example, the disclosures identified for claim 1.
21. The wireless end-user device of claim 1, wherein the one or more processors are further configured to classify between: user applications; system applications, utilities, functions, or processes; and operating system application, utilities, functions, or processes.	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein the one or more processors are further configured to classify between: user applications; system applications, utilities, functions, or processes; and operating system application, utilities, functions, or processes."  See, for example, the disclosures identified for claim 1.
22. The wireless end-user device of claim 1, wherein the second one or more applications or services comprises foreground services.	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein the second one or more applications or services comprises foreground services."  See, for example, the disclosures identified for claim 1.
23. The wireless end-user device of claim 1, wherein selectively deny comprises intermittently block when the one or more Internet service activities are requested during selected time windows.	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein selectively deny comprises intermittently block when the one or more Internet service activities are requested during selected time windows."  See, for example, the disclosures identified for claim 1.
24. The wireless end-user device of claim 1, wherein the one or more processors are configured to pre-	The Accused Instrumentalities comprise "[t]he wireless end-user device of claim 1, wherein the one or more processors are configured to prevent the first one or more applications from changing the power state of at least one of the modems, and to not prevent the second one or more applications from changing the power state of the same modem or modems."

Claim	Public Documentation
vent the first one or more applica- tions from changing the power state of at least one of the modems, and to not prevent the second one or more applications from chang- ing the power state of the same mo- dem or modems.	